








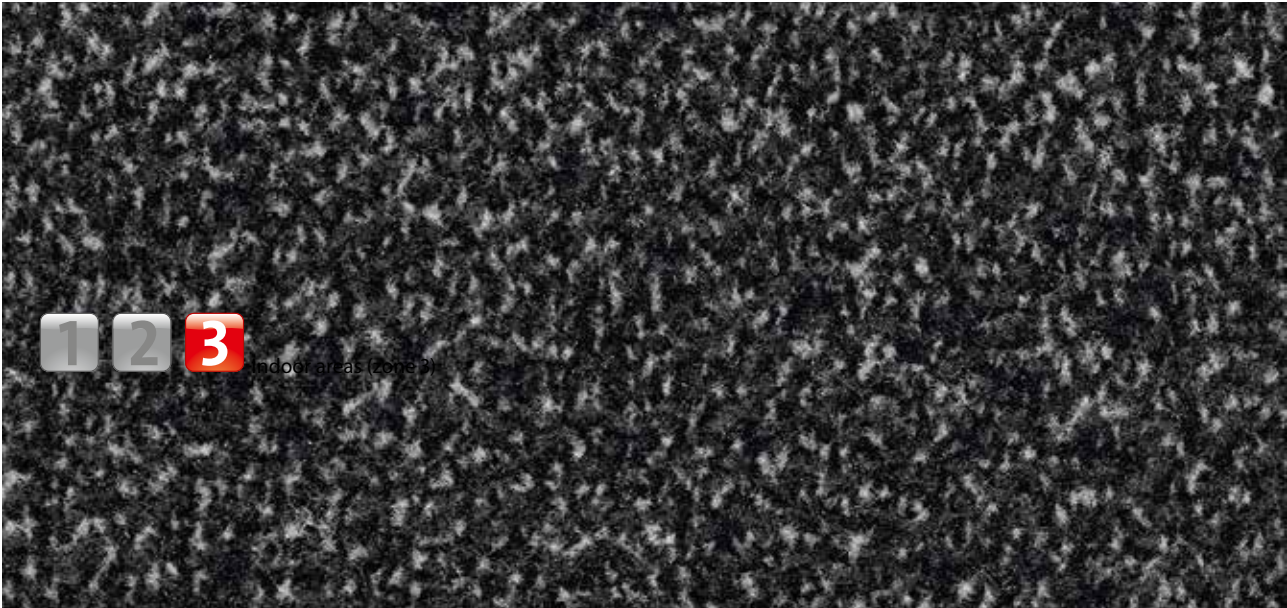

Model INNOVA









Description

An innovative, high-quality clean-off solution that can be adapted perfectly to suit all requirements relating to design and technology, and consistently reduces dirt. It not only looks great, but also improves features such as room acoustics.

				
Anti-static	Castor-resistant	Suitable for stairs	DS (EN 13893)	Resistant strength
				
Cfl-s1	High	Highly suitable for property		

Colours

			
36.01 black	36.02 anthracite	36.03 grey	36.04 brown
			
36.05 red	36.10 slate		

Model INNOVA

Construction	Tufting velour 5/32"
Pile above substrate	100% polyamide
Substrate material	Polyester fleece
Backing material	Heavy coating
Pile weight / fibre weight	885
Total weight (g/m²)	3460
Overall height (mm)	8
Tuft density/m²	75590
Slip resistance	DS (EN 13893)
Certificates	CE conformity EN 14041 (rolls only)
Supplied as rolls	100 cm wide (incl. border) 150 cm wide (incl. border) 200 cm wide (incl. border)
Supplied as mats	60 x 90 cm (incl. border) 90 x 150 cm (incl. border) 130 x 200 cm (incl. border) 200 x 300 cm (incl. border)
Product characteristics	Soiling and moisture absorption
Laying	Individual rolls or smaller coverings can be laid loose on any smooth floor. For larger areas, and allowing for on-site conditions, we recommend fixed laying with an adhesive suitable for plasticised PVC.
Cleaning	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).
Brand	emco

Subject to technical modifications