


Clean-off system

Model MAXIMUS®

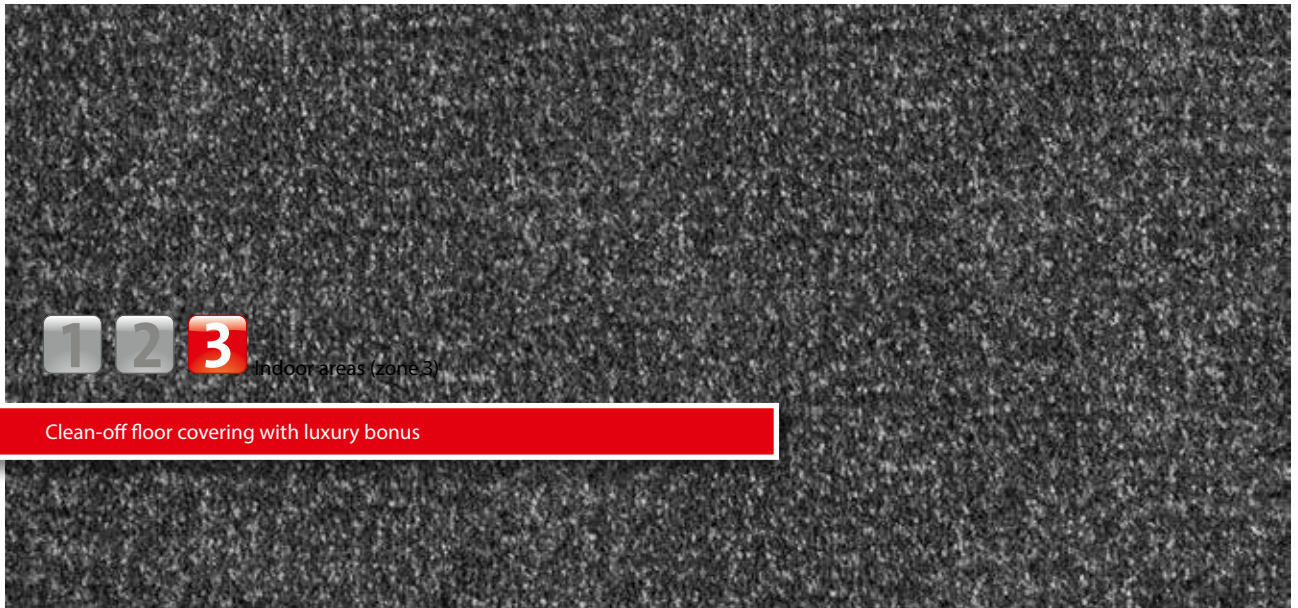

Description

MAXIMUS® is a clean-off floor covering for high-traffic areas where nothing but the most comfortable floor will do. 5 mottled colours, 5 atmospheric colours and 8 single colours are available for sophisticated indoor areas in order to make rooms look great and provide excellent protection.



Anti-static



Castor-resistant



Suitable for stairs



DS (EN 13893)



Resistant strength



Bfl-s1





















Luxurious



Highly suitable for property

Model MAXIMUS®

Colours

 <p>82.01 black Ambiente</p>	 <p>82.02 anthracite Ambiente</p>	 <p>82.03 grey Ambiente</p>	 <p>82.06 blue Ambiente</p>	 <p>82.07 red Am- biente</p>	 <p>Black 80.01</p>	 <p>Black mottled 81.01</p>	 <p>Anthracite 80.02</p>
 <p>Anthracite mottled 81.02</p>	 <p>Grey 80.03</p>	 <p>Grey mottled 81.03</p>	 <p>Brown 80.04</p>	 <p>Brown mottled 81.04</p>	 <p>Beige 80.05</p>	 <p>Beige mottled 81.05</p>	 <p>Blue 80.06</p>
 <p>Red 80.07</p>	 <p>Bordeaux single colour 80.08</p>						

Clean-off system

Model MAXIMUS®

Construction	Tufting-Velours 1/8"
Pile above substrate	100% polyamide
Substrate material	Polyester fleece
Backing material	Heavy coating
Pile weight / fibre weight	1000
Total weight (g/m²)	3410
Overall height (mm)	9
Tuft density/m²	138600
Slip resistance	DS (EN 13893)
Certificates	CE conformity EN 14041 (rolls only)
Supplied as rolls	130 cm wide (incl. border) 200 cm wide (incl. border)
Supplied as mats	60 x 90 cm (incl. border) 90 x 150 cm (incl. border) 130 x 200 cm (incl. border)
Product characteristics	Soiling and moisture absorption
Laying	Individual rolls or smaller coverings can be laid loose on any smooth floor. For larger areas, and allowing for on-site conditions, we recommend fixed laying with an adhesive suitable for plasticised PVC.
Cleaning	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).
Brand	emco

Subject to technical modifications

emco Bau- und Klimatechnik GmbH & Co. KG · Breslauer Straße 34 - 38 ·
49808 Lingen (Ems) Germany · Phone: 0591/9140-0 · Fax: 0591/9140-852 ·
e-mail: bau@emco.de · www.emco-bau.com

