


# Model PREMIUM



### Description

Our PREMIUM clean-off floor coverings give entrances a real wow factor. The specially developed fibres are able to conceal the dirt and keep it out of sight. This mechanically tufted velour is particularly well suited to buildings where it is important to have a floor covering that is not only functional, but also gives a good impression. In terms of looks, PREMIUM clean-off floor coverings meet the highest of design standards.

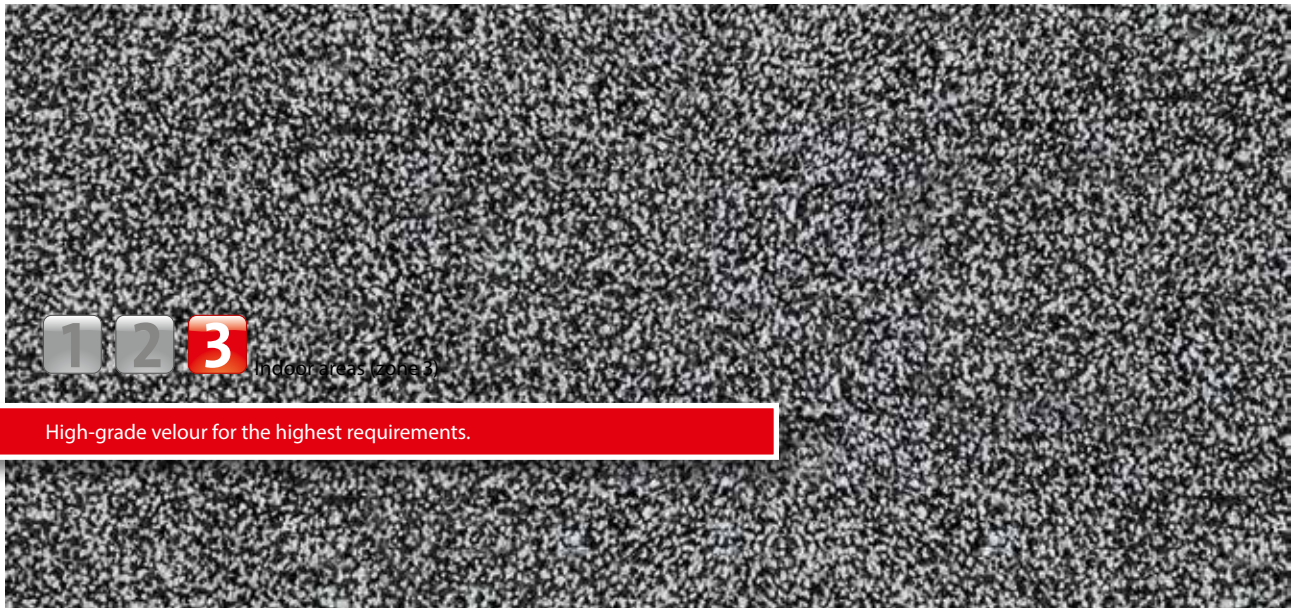

Anti-static



Castor-resistant



Suitable for stairs



DS (EN 13893)



Resistant strength



Cfl-s1



Luxurious



Highly suitable for property

### Colours



75.01 Anthracite



75.03 Beige



75.11 Black



75.12 Red



75.15 Slate

## Clean-off system

---

# Model PREMIUM

<b>Construction</b>	Tufting velour 5/32"
<b>Pile above substrate</b>	100% polyamide
<b>Substrate material</b>	Polyester fleece
<b>Backing material</b>	Heavy coating
<b>Pile weight / fibre weight</b>	2050
<b>Total weight (g/m<sup>2</sup>)</b>	4670
<b>Overall height (mm)</b>	11
<b>Tuft density/m<sup>2</sup></b>	76000
<b>Slip resistance</b>	DS (EN 13893)
<b>Certificates</b>	CE conformity EN 14041 (rolls only)
<b>Supplied as rolls</b>	200 cm wide (incl. border)
<b>Product characteristics</b>	Soiling and moisture absorption
<b>Laying</b>	Individual rolls or smaller coverings can be laid loose on any smooth floor. For larger areas, and allowing for on-site conditions, we recommend fixed laying with an adhesive suitable for plasticised PVC.
<b>Cleaning</b>	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).
<b>Brand</b>	emco

Subject to technical modifications

emco Bau- und Klimatechnik GmbH & Co. KG · Breslauer Straße 34 - 38 ·  
49808 Lingen (Ems) Germany · Phone: 0591/9140-0 · Fax: 0591/9140-852 ·  
e-mail: bau@emco.de · www.emco-bau.com

