


Model PRESTIGE



Description

A high-quality product sold in roll format, in five timeless colours, for all critical areas that are prone to soiling.

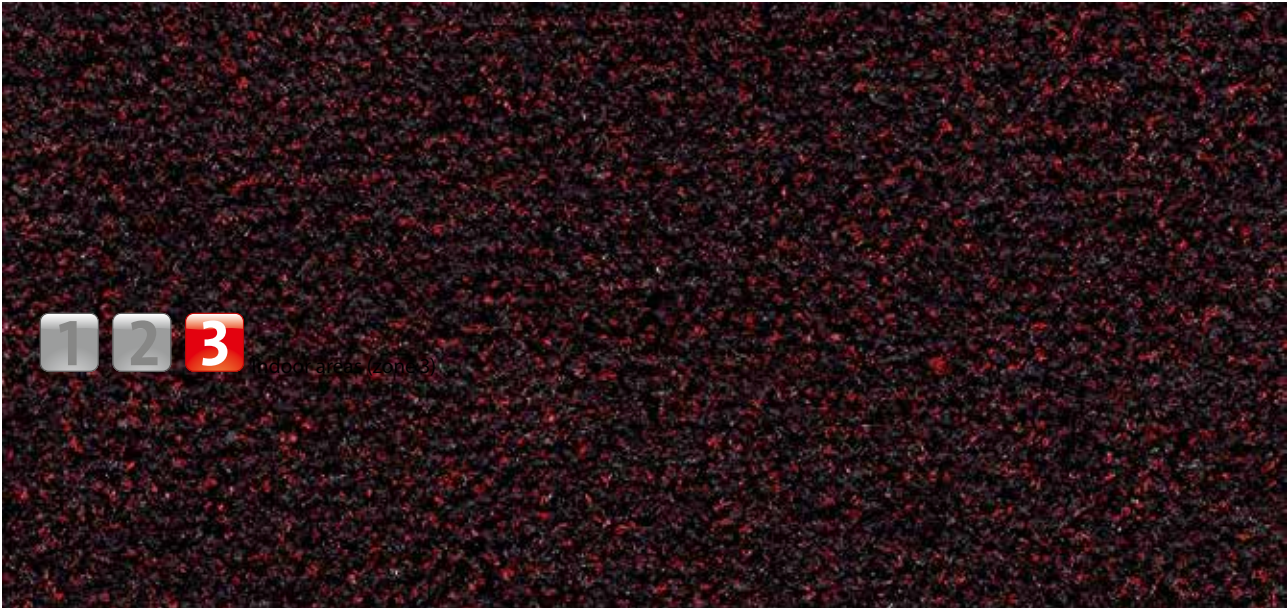

Anti-static



Castor-resis-
tant



Suitable for
stairs



DS (EN 13893)



Resistant
strength



Cfl-s1



Luxurious



Highly
suitable for
property

Colours



61.01 anthracite



61.02 grey



61.03 brown



61.04 red



61.05 blue

Clean-off system

Model PRESTIGE

Construction	Tufting-Velours 1/8"
Pile above substrate	100% polyamide
Substrate material	Polyester fleece
Backing material	Heavy coating
Pile weight / fibre weight	975
Total weight (g/m²)	3560
Overall height (mm)	8
Tuft density/m²	141730
Slip resistance	DS (EN 13893)
Certificates	CE conformity EN 14041 (rolls only)
Supplied as rolls	130 cm wide (incl. border) 200 cm wide (incl. border)
Product characteristics	Soiling and moisture absorption
Laying	Individual rolls or smaller coverings can be laid loose on any smooth floor. For larger areas, and allowing for on-site conditions, we recommend fixed laying with an adhesive suitable for plasticised PVC.
Cleaning	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).
Brand	emco

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems) ·
Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email: bau@emco.de
· www.emco-bau.com

The logo for EMCO, consisting of the letters 'EMCO' in a bold, red, sans-serif font with a white outline.