




emco carpet mats

Clean – Custom options – Premium Quality

Designing clean entrances

**EMCO**

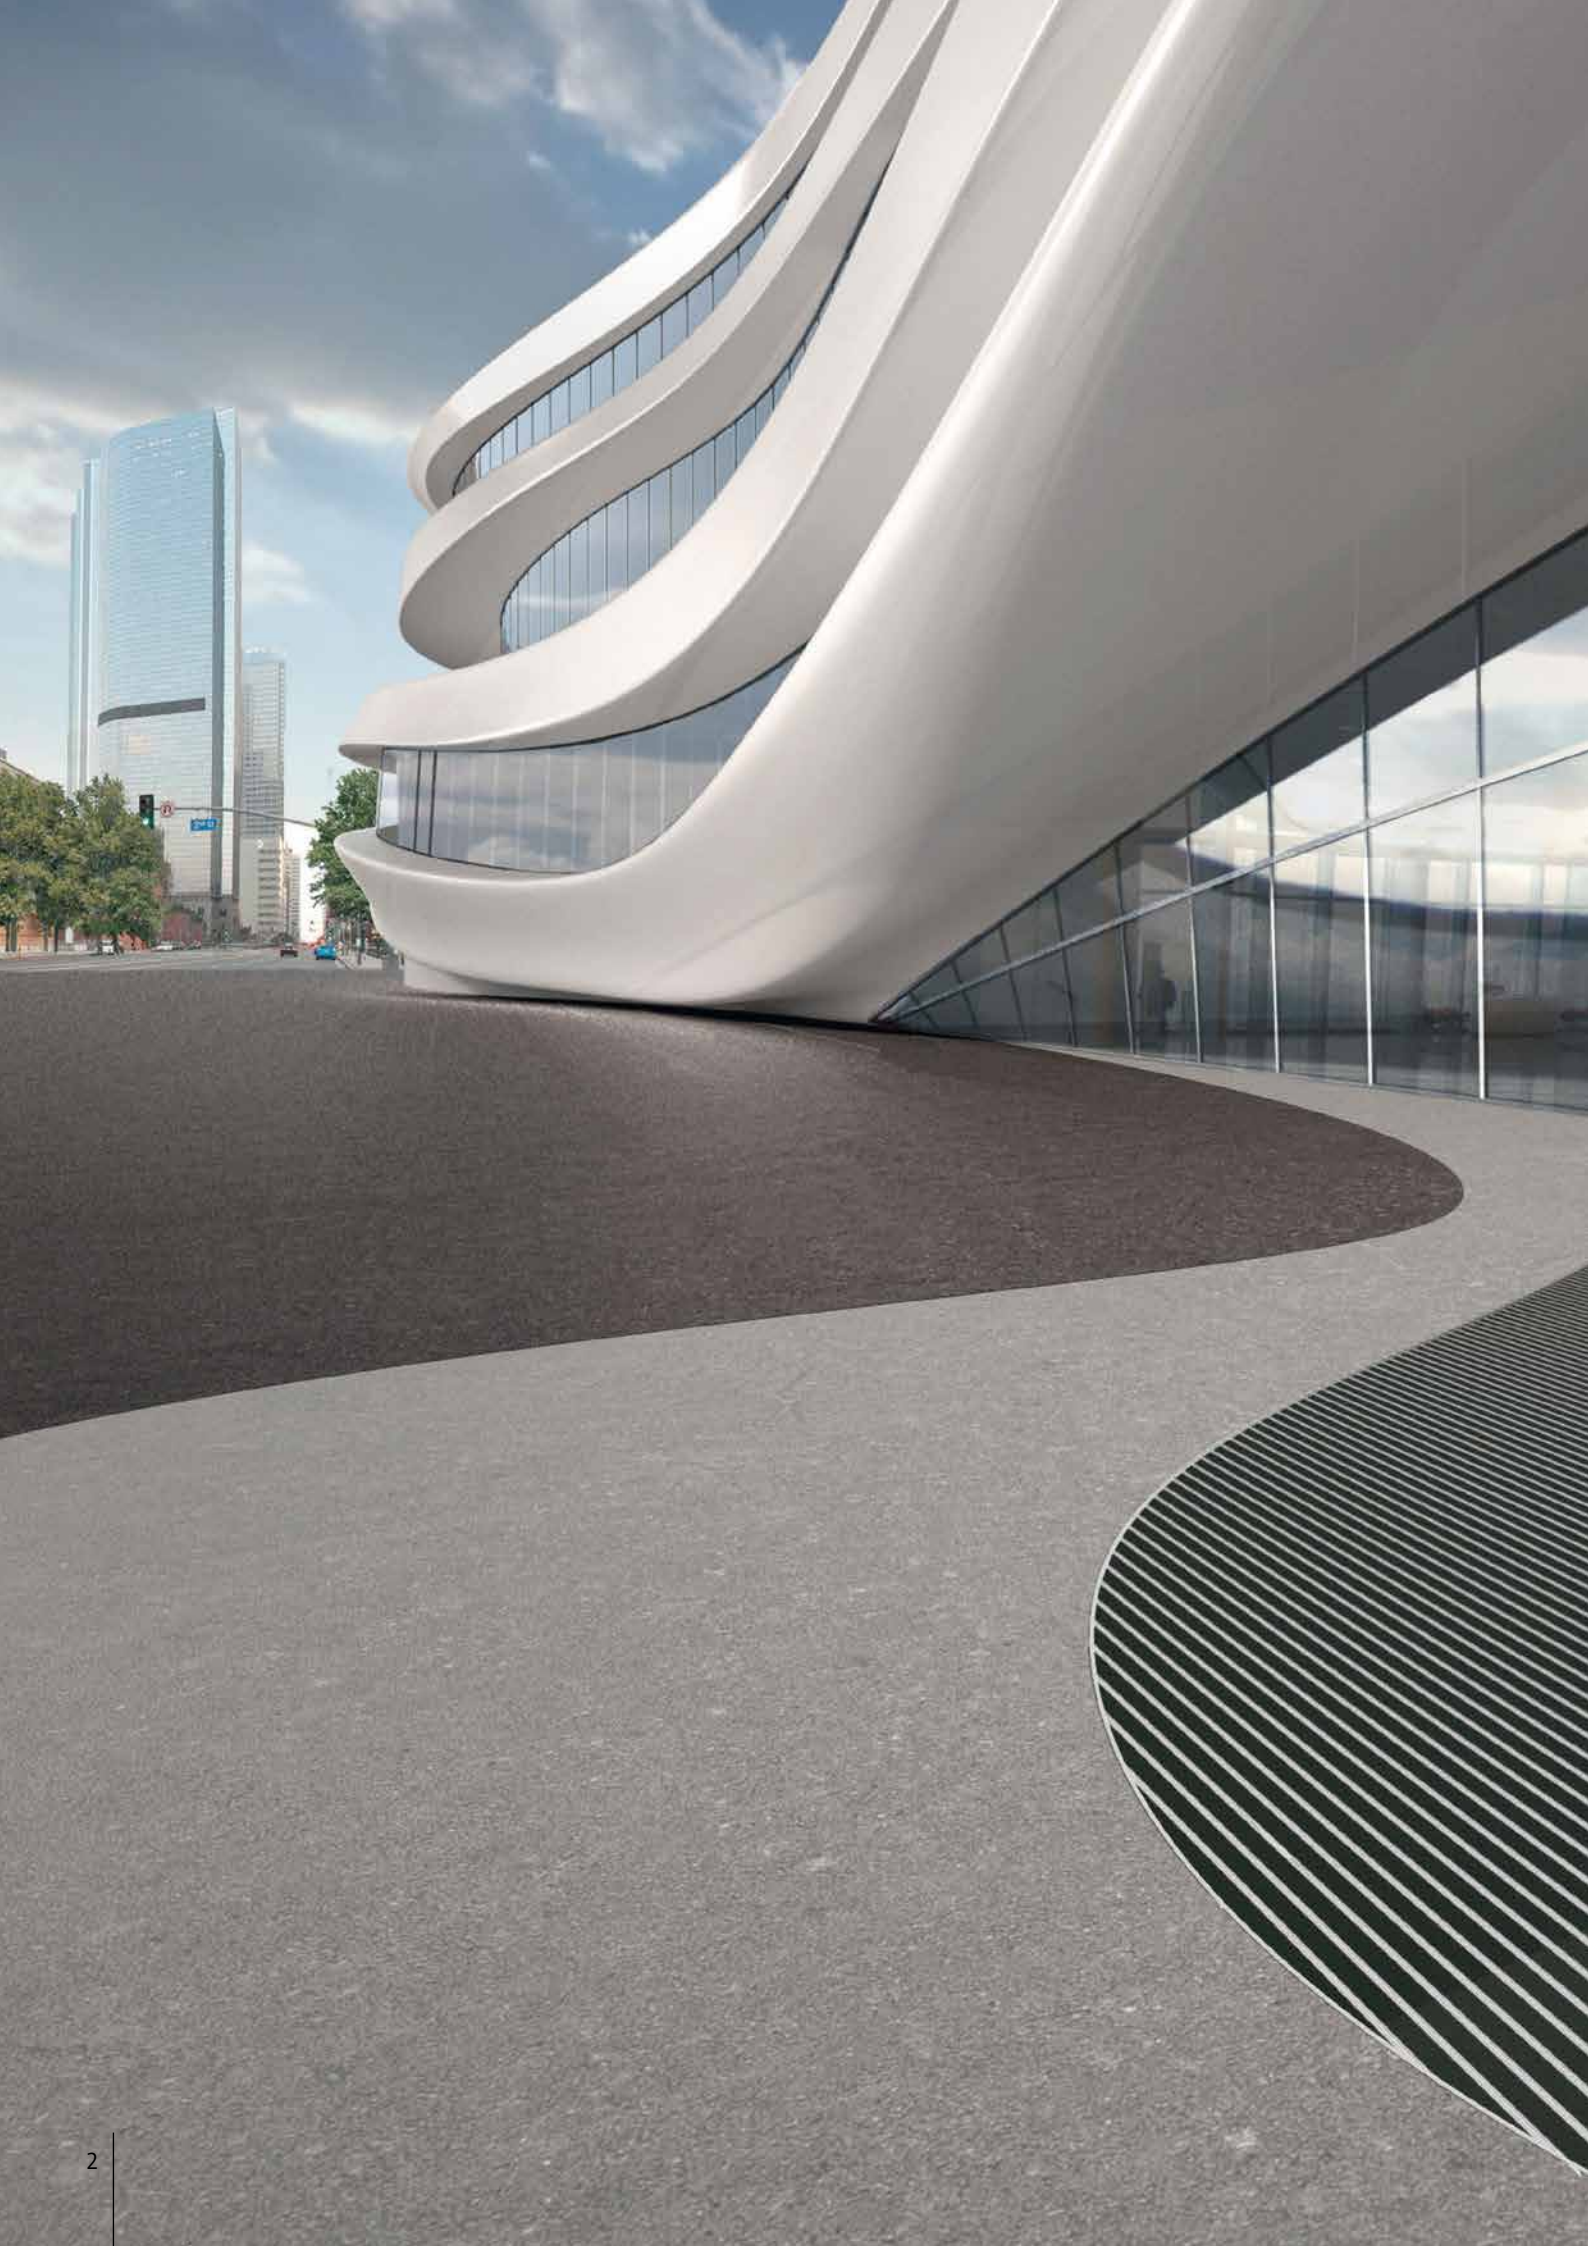

# Designing clean entrances

Take the first step towards cleanliness – on our entrance matting systems. We are one of the world's leading manufacturers of entrance mat systems that are designed to reduce dirt and damp trafficking into buildings. But our systems do much more than protect buildings and their users. Combining customised designs and high-quality workmanship, they help any entrance area make a grand entrance of its own.

## emco carpet mats

<b>Variety, flexibility and quality right down to the last detail</b> .....	4 – 9
emco <b>IMAGE</b> .....	10 – 13
emco <b>IMAGE STYLE</b> .....	14 – 17
emco <b>IMAGE OUTDOOR</b> .....	18 – 21
emco <b>CLASSIC</b> .....	22 – 25
<b>Colours and design</b> .....	26 – 27
<b>Label positions</b> .....	28 – 29
<b>Material, quality and warranty</b> .....	30
<b>Washing and storage</b> .....	31
<b>Benefits</b> .....	32
<b>The company</b> .....	33
<b>Order form</b> .....	34
<b>Sales offices</b> .....	35 – 36

# The right entrance

As the European leader in the entrance matting systems market, we aim to ensure that building interiors provide hygienic, safe environments – and our washable carpet mats are our solution to this. To create them, we combine decades of experience, innovative production processes and superior design standards. And the result? High-quality carpet mats that not only offer winning functional features, but also provide an attention-grabbing advertising medium. Our carpet mats are manufactured exclusively in Germany.

To ensure that your entrance is always right, we offer different product lines for our carpet mats:

- emco IMAGE prepares the ground for your ideas – from the company logo to a picture.
- The innovative production technology used for the emco IMAGE STYLE allows the carpet mat to be cut to virtually any desired shape.
- With emco IMAGE OUTDOOR, the good impression begins even before you reach the door.
- emco CLASSIC, meanwhile, provides a more standardised alternative that is ideal for rental purposes.





Märchenwald  
Hotel - Restaurant



# Perfectly positioned

Thanks to their high quality and the wide variety of options they offer, our carpet mats can be positioned anywhere in a building. Of course, it makes particular sense to place them in areas that high volumes of people are likely to spend time in or pass through – such as entrance areas, waiting areas, circulation areas like corridors and stairways, as well as inside and in front of lifts. Their ability to considerably reduce the risk of slippage caused by moisture ensures the areas stay clean and safe. As they are washable, they also offer a long and reliable service life.

If a carpet mat is intended to provide both a cleaning function and a representative image, then it is worth placing it in a prominent position in the room.



# Quality does not appear out of nowhere

Creating the perfect product requires a combination of experience, high-quality materials and precision.

Both the pile fibre material and the nitrile rubber used for the backing have been specially chosen for our products and are the best materials for the job. The production process – consisting of several production steps that are designed to enhance quality and performed on state-of-the-art machines – combines the fibre material and nitrile rubber to create a consistently high-quality carpet mat that maintains the same excellent standards even when subjected to heavy usage and frequent cleaning intervals.









# emco IMAGE

## Get your message across

If you want a carpet mat that provides information and advertising space in addition to being a cleaning system, then emco IMAGE is just what you are looking for.


Each mat can be printed with up to 32 bright colours, chosen from a total of 45 standard colours. Not only that, but special colours conforming to systems such as PMS, RAL and HKS can also be used. Thanks to the superior printing quality, it is possible to create detailed drawings, text and design elements as well as effects such as outlines, shadows and colour gradients. You can have a carpet mat in colours that match your corporate identity, or displaying a graphic design or an individual company logo. And with the option to produce patterned areas or single images of up to 2 m wide, the emco IMAGE carpet mat gives you virtually unlimited freedom to create the design you want.



# emco IMAGE

Technical data	
Pile material	High twist nylon (100% polyamide 6.6), effective pile weight 900 g/m <sup>2</sup>
Pile height	Approx. 7-8 mm
Backing material	Nitrile rubber coating, thickness approx. 1,4 mm plus border reinforcement
Total height of mat	Approx. 8-9 mm
Total weight	2.600 g/m <sup>2</sup>
Border width	Approx. 20 mm
Printing method	Chromojet printing method
Colours	Max. 32 of 45
Water absorption	Approx. 3 to 4 litres per m <sup>2</sup>
Washing temperature	Max. 60 °C
Fastness to washing	Colourfast in acc. with DIN 54006
Electrostatic behaviour	Very low electrostatic discharge, volume resistance 2.2 x 10 <sup>11</sup> ohms, in acc. with DIN 54345
Oil resistance (nitrile rubber backing)	Very good
Fire resistance (on request, subject to additional charge)	Acc. to C <sub>n</sub> - s <sup>1</sup> (in acc. with EN 13501), flame resistant
Customer specific border label	On request
Backing material	Smooth or dimpled
Dimensional tolerance	+/- 3%

Standard dimensions in cm				
85 x 75	100 x 200	115 x 180	150 x 200	200 x 200
85 x 120		115 x 200	150 x 250	200 x 300
85 x 150		115 x 240		200 x 400
Special dimensions possible, up to 200 x 500 cm				

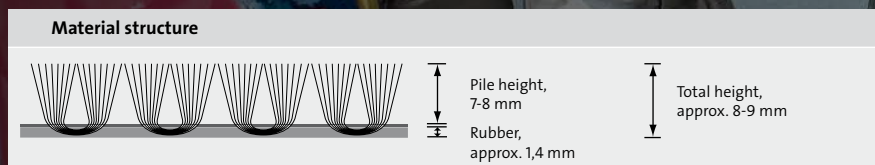

## Colours (for further information s. p. 26)








# emco IMAGE STYLE

## Logo – A real eye-catcher

The emco IMAGE STYLE special shape mat combines the brightness and variety of colour of emco IMAGE with the ability to create virtually any shape of your choosing. Thanks to the very latest technology, mats can now also be cut in special shapes (to represent products or company logos, for example). Thanks to this ability to support custom designs, emco IMAGE STYLE mats exude quality and functionality, as well as grabbing the attention as a promotional medium. Complex special formats to complement structural design can also be achieved.

## Guiding and enticing


With their truly individual eye catching style, the emco IMAGE STYLE special shape mats turn floors into a promotional medium. They are ideal for both long-term campaigns and one-off promotions and seasonal marketing – they are flexible in application as they can be moved to wherever they are needed the most. The custom design mats function as guidance systems, as their design, format and size can be adapted to meet prevailing building requirements with ease, taking visitors and customers where you want them to go.

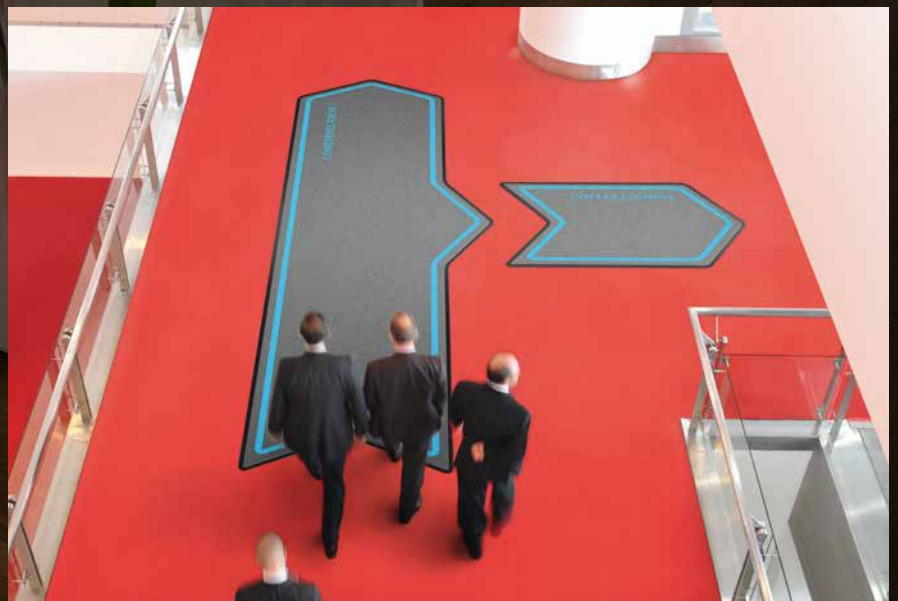

# emco IMAGE STYLE

Technical data	
Pile material	High twist nylon (100% polyamide 6.6), effective pile weight 900g/m <sup>2</sup>
Pile height	Approx. 7-8 mm
Backing material	Nitrile rubber coating, thickness approx. 2 mm
Total height of mat	Approx. 8-9 mm
Total weight	2.600 g/m <sup>2</sup>
Border width	Approx. 20 mm
Printing method	Chromojet printing method
Colours	Max. 32 of 45
Water absorption	Approx. 3 to 4 litres per m <sup>2</sup>
Washing temperature	Max. 60 °C
Fastness to washing	Colourfast in acc. with DIN 54006
Electrostatic behaviour	Very low electrostatic discharge, volume resistance 2.2 x 10 <sup>11</sup> ohms, in acc. with DIN 54345
Oil resistance (nitrile rubber backing)	Very good
Fire resistance (on request, subject to additional charge)	Acc. to C <sub>fl</sub> - s <sup>1</sup> (in acc. with EN 13501), flame resistant
Customer specific border label	On request
Backing material	Smooth or dimpled
Dimensional tolerance	+/- 3%

Standard dimensions in cm				
85 x 75	100 x 200	115 x 180	150 x 200	200 x 200
85 x 120		115 x 200	150 x 250	200 x 300
85 x 150		115 x 240		200 x 400
Special dimensions possible, up to 200 x 500 cm				

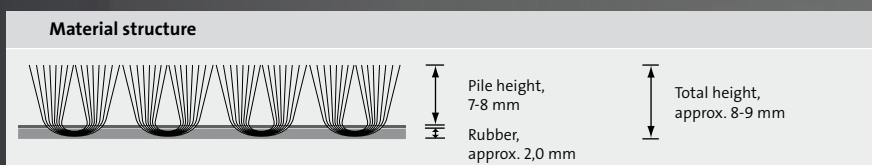

## Colours (for further information s. p. 26)









# emco IMAGE OUTDOOR

## Impresses visitors

Weatherproof and custom printed, emco IMAGE OUTDOOR gives customers a clear message before they even enter the building.


Its brush effect ensures a polished appearance indoors, too. The materials and workmanship are specifically tailored for use in outdoor areas, ensuring that water and UV light do not dim the message. Damp and moisture are channelled through drainage holes directly towards the ground, where they can run off freely thanks to the dimpling on the backing. The weatherproof and water-repellent pile material further encourages this process. Logos, claims, customised text or bespoke motifs stay lastingly attractive. And what happens if the mat gets really dirty? It can simply be washed.



# emco IMAGE OUTDOOR



Technical data	
Pile material	High twist nylon (100% polyamide 6.6), effective pile weight 1.000/m <sup>2</sup>
Pile height	Approx. 7-8 mm
Backing material	Nitrile rubber coating, thickness approx. 2 mm
Total height of mat	Approx. 8-9 mm
Total weight	3.200 g/m <sup>2</sup>
Border width	Approx. 20 mm
Printing method	Chromojet printing method
Colours	Max. 17
Washing temperature	Max. 40 °C
Fastness to washing	Colourfast in acc. with DIN EN20105-C01
Lightfastness	Good to very good lightfastness
Customer specific border label	On request
Backing material	Dimples over the entire surface, with holes to drain off the water
Dimensional tolerance	+/- 5%

Standard dimensions in cm		
50 x 75	85 x 150	150 x 200
60 x 90	115 x 200	200 x 300
85 x 75	130 x 200	200 x 400
Special dimensions on request		

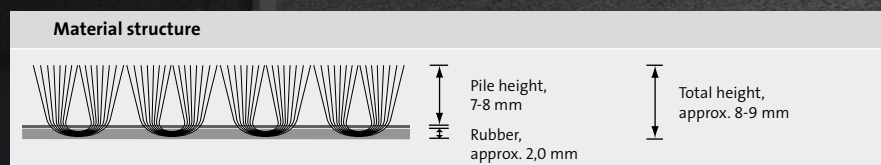


Colours (for further information s. p. 26)



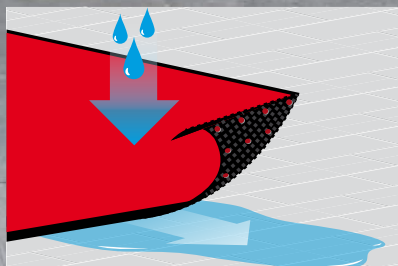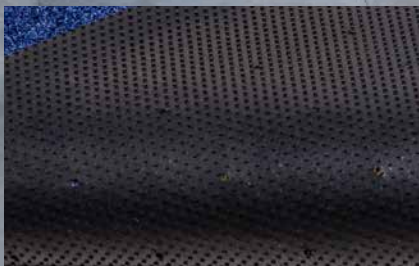

The fine holes in the backing material prevent water collecting in the mat, so that it remains effective even in the rain.

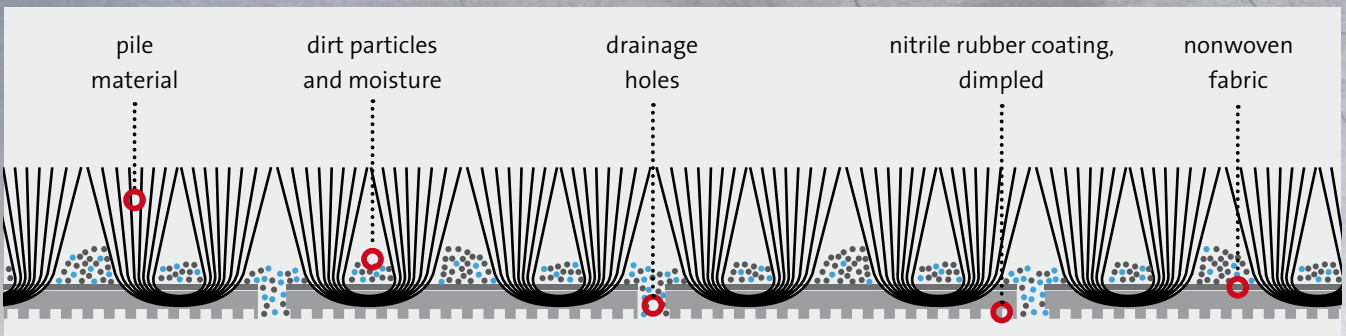





# emco CLASSIC

## Traditional quality

Wherever neutrality and functionality are the order of the day, emco CLASSIC carpet mats can be relied upon to do their job in perfect harmony with their surroundings. In so doing, they provide the perfect complement to prominently positioned emco IMAGE carpet mats.


Thanks to optimum product quality, the mats are able to absorb dirt and moisture very well. Floors and floor coverings can be sure of long-term protection, as the hard-wearing mats are just as much a match for intense loads as they are for cleaning at frequent intervals. Without printed images, the mats are available in five standard colours measuring up to 200 x 500 cm.

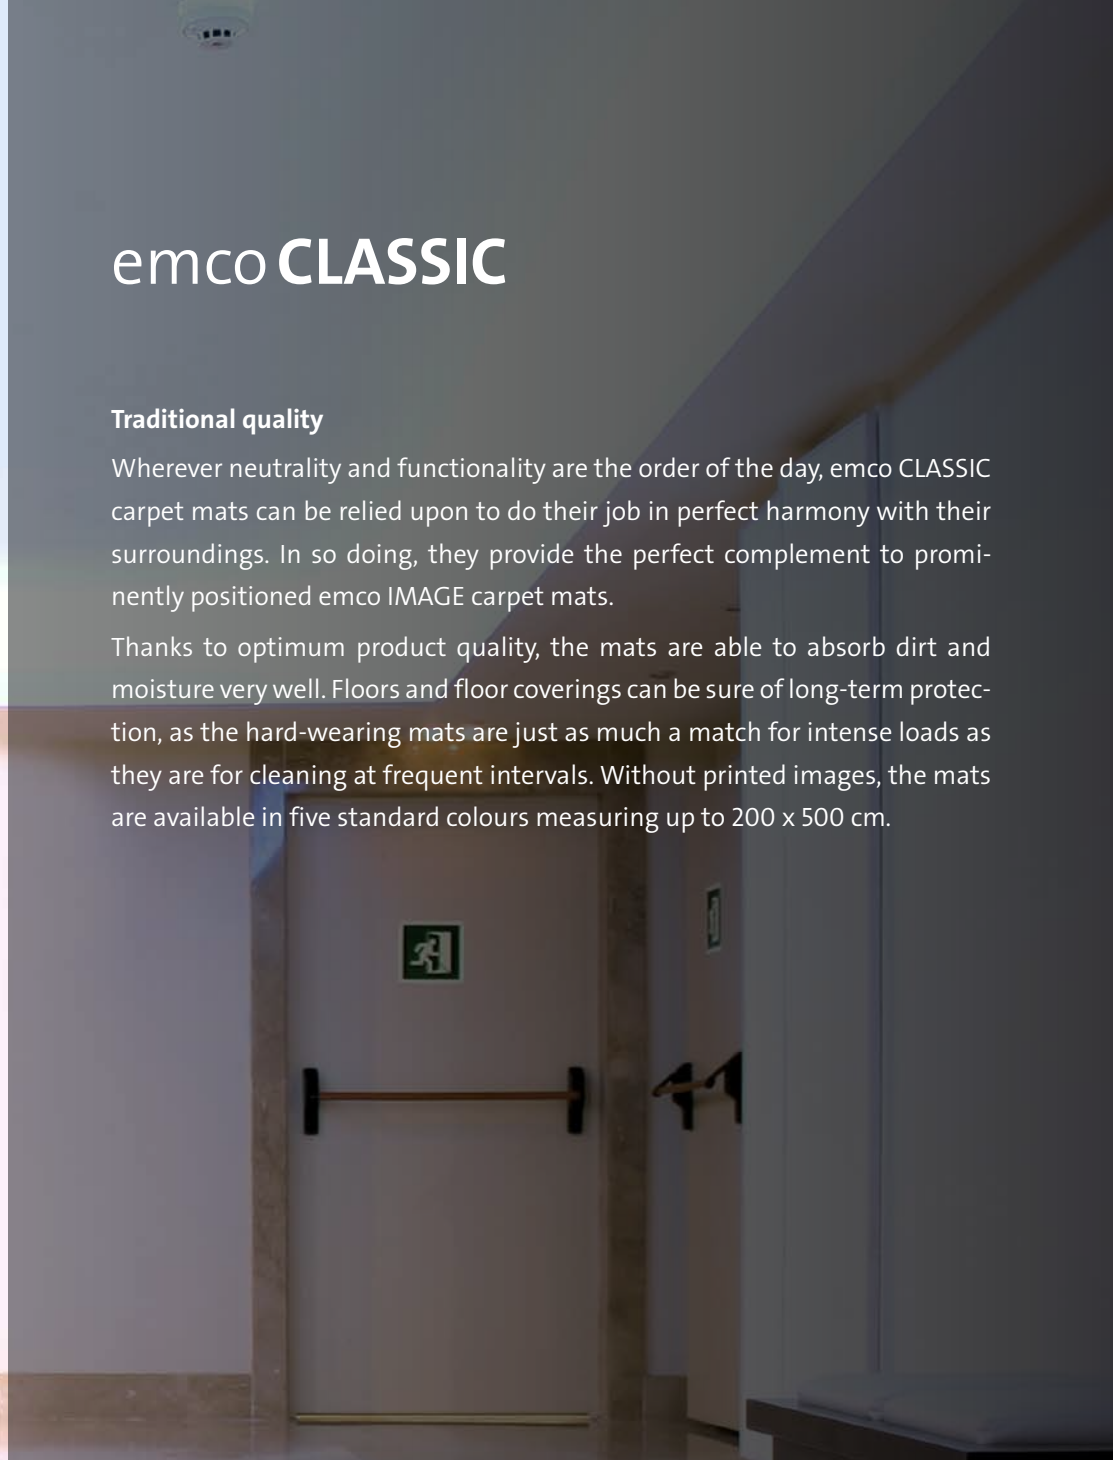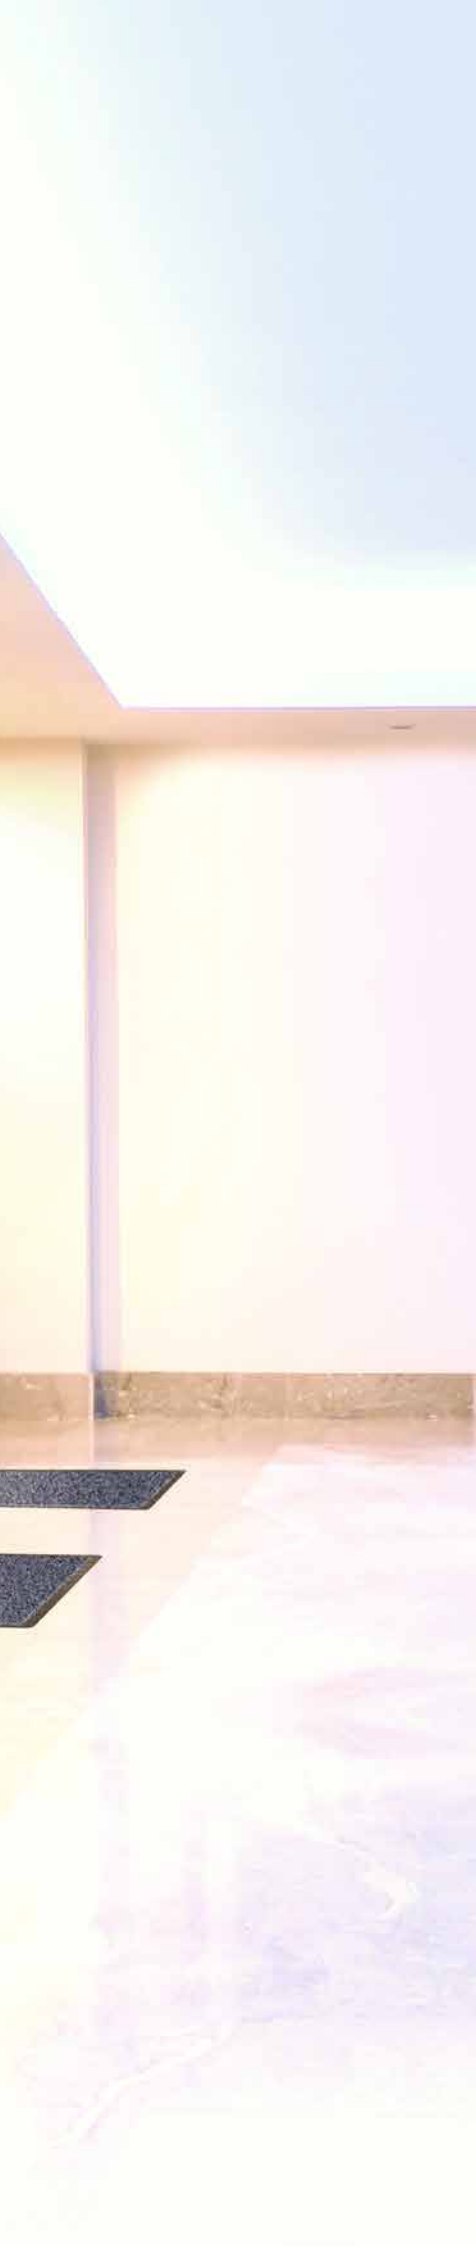

# emco CLASSIC

Technical data	
Pile material	High twist nylon (100% polyamide 6), effective pile weight 650 g/m <sup>2</sup>
Pile height	Approx. 8 mm
Backing material	Nitrile rubber coating, thickness approx. 1,4 mm plus border reinforcement
Total height of mat	Approx. 10 mm
Total weight	2.500 g/m <sup>2</sup>
Border width	Approx. 20 mm
Colours	5
Water absorption	Approx. 3 to 4 litres per m <sup>2</sup>
Washing temperature	Max. 80 °C
Electrostatic behaviour	Very low electrostatic discharge, volume resistance 2.2 x 10 <sup>11</sup> ohms, in acc. with DIN 54345
Oil resistance (nitrile rubber backing)	Very good
Fire resistance (on request, subject to additional charge)	Acc. to C <sub>fi</sub> - s <sup>1</sup> (in acc. with EN 13501), flame resistant
Customer specific border label	On request
Backing material	Smooth or dimpled
Dimensional tolerance	+/- 3%

Standard dimensions in cm				
85 x 75	100 x 200	115 x 180	150 x 200	200 x 200
85 x 120		115 x 200	150 x 250	200 x 300
85 x 150		115 x 240		200 x 400
Special dimensions possible, up to 200 x 500 cm				

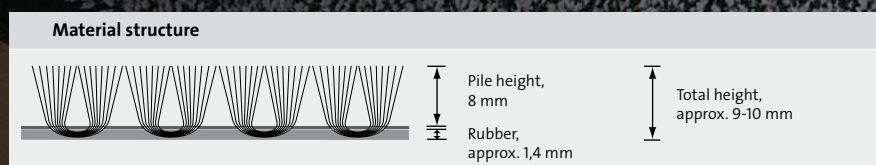

## Colours



C 10  
Grey



C 20  
Rock



C 30  
Graphite




C 50  
Dark Blue



C 60  
Dark Brown



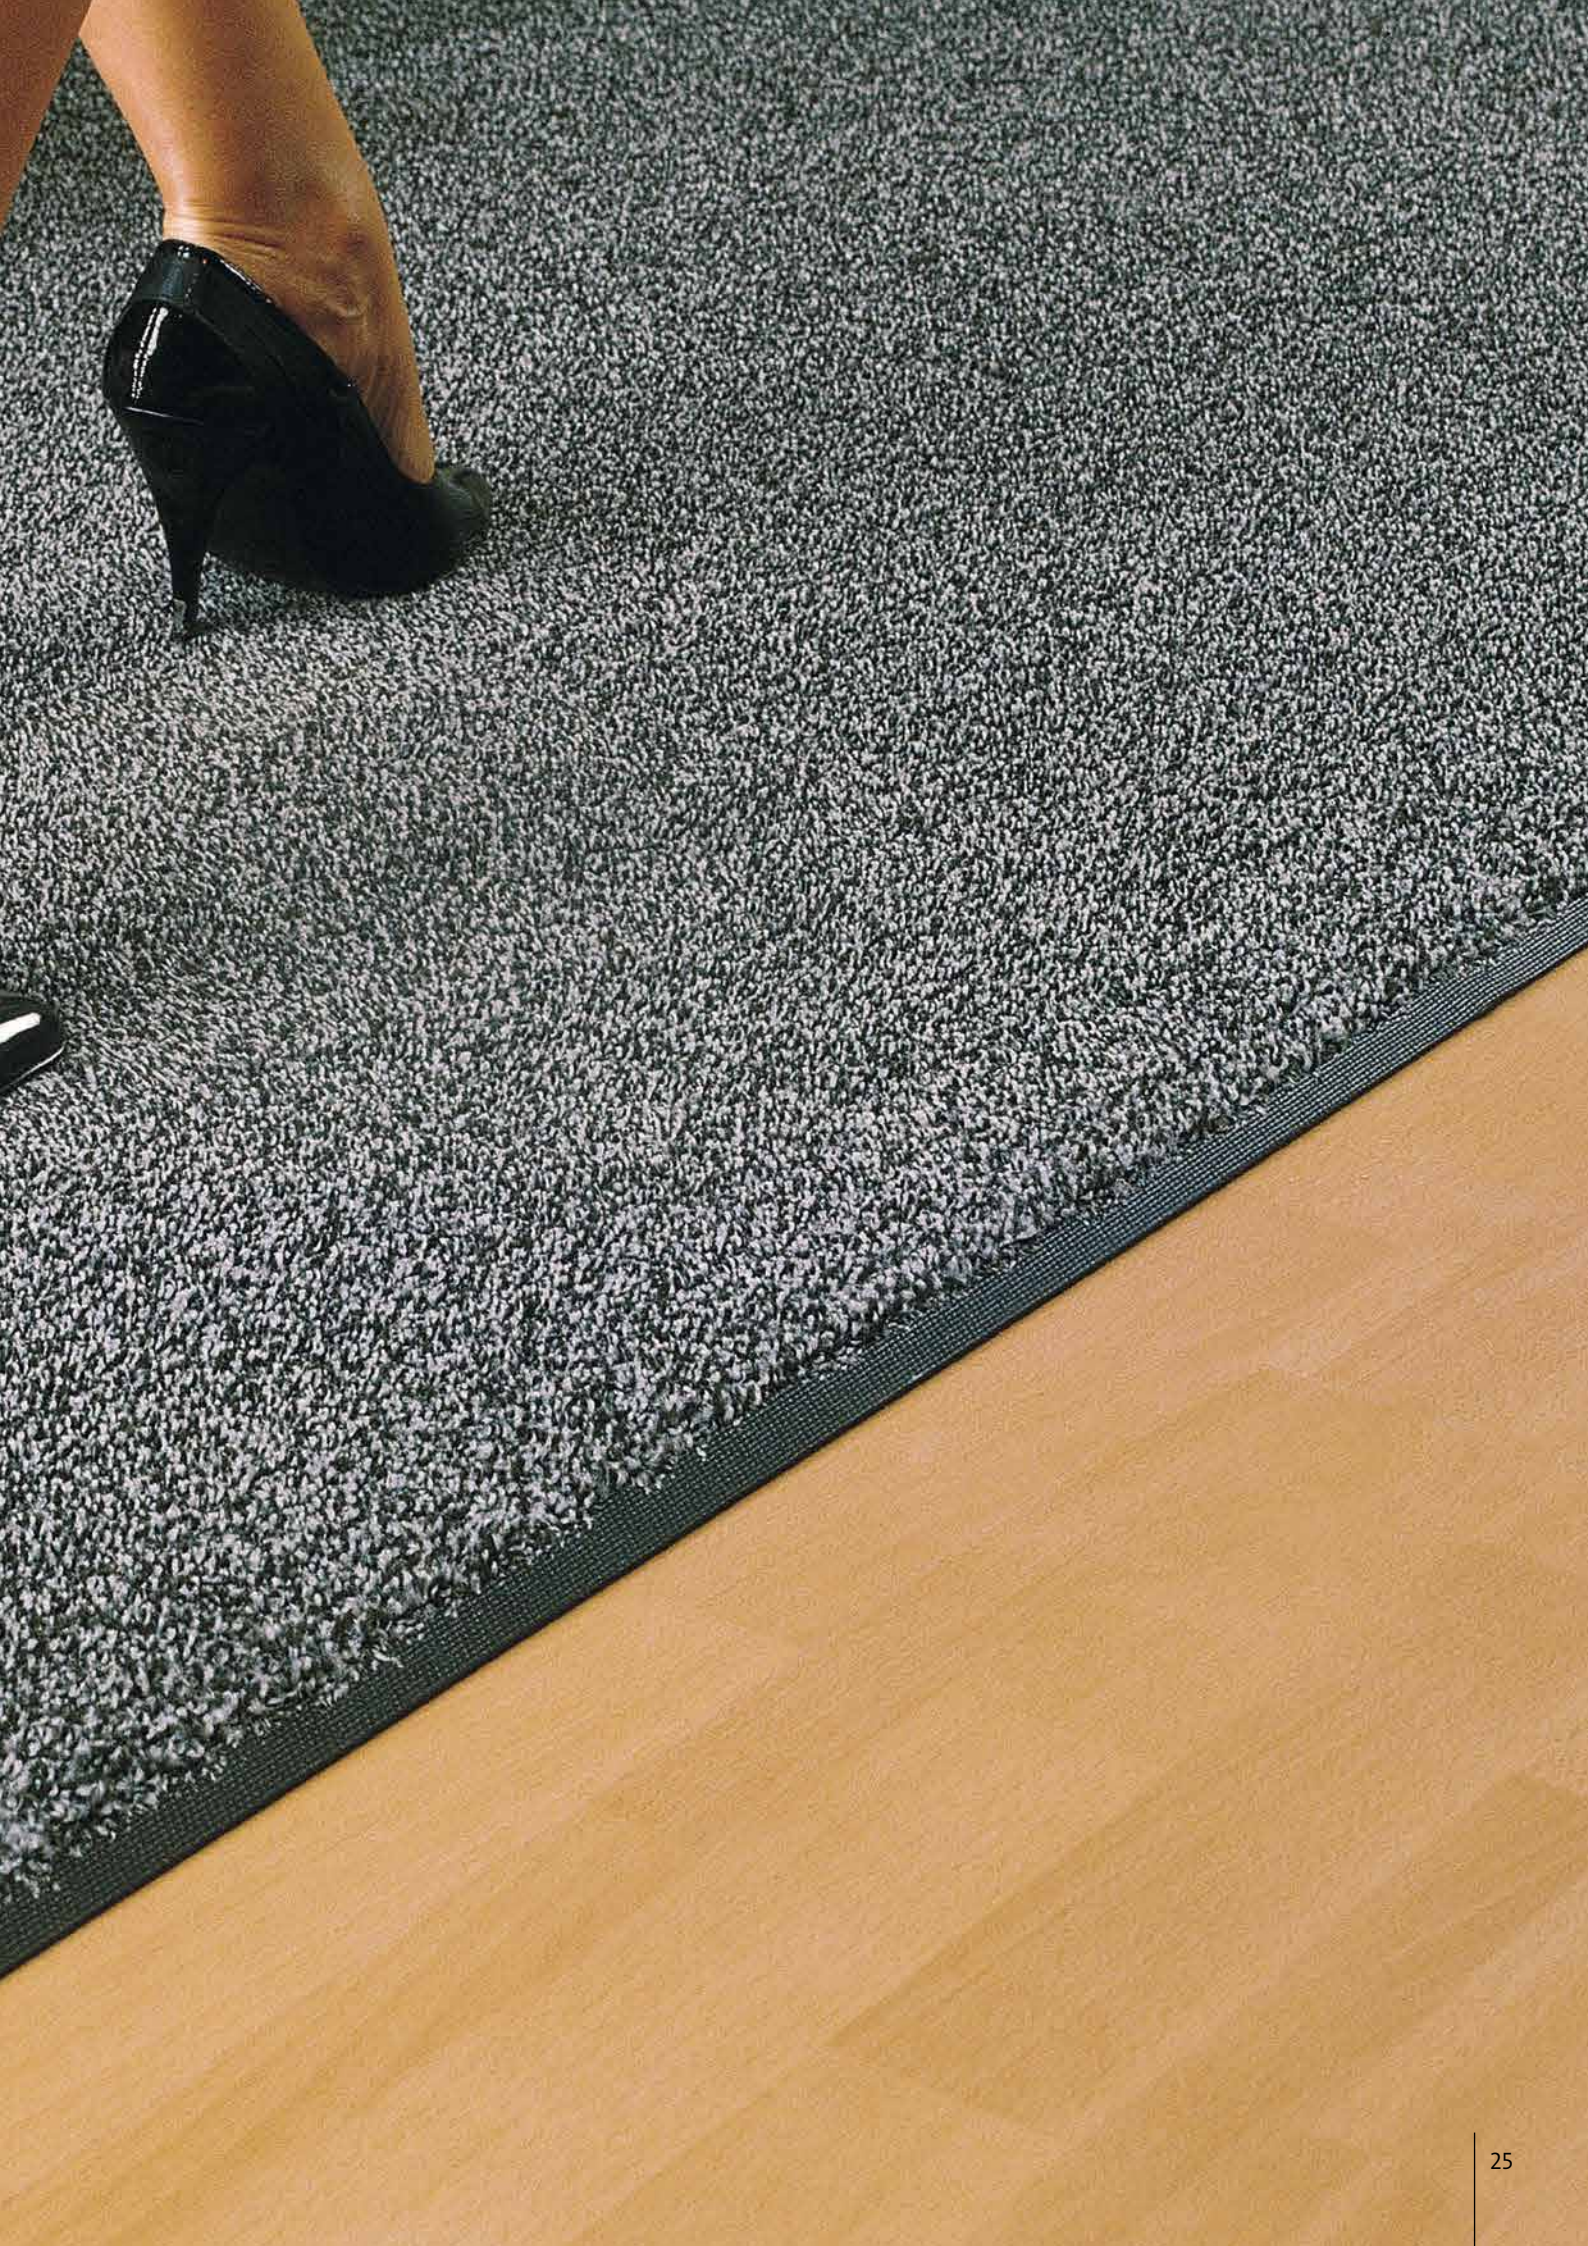

## Colours

We provide clearly defined standard Pantone colours and no mixed colours, meaning that our colours provide outstanding luminance. You can choose from 45 standard colours (see below) and have up to 32 different colours printed per mat. Special colours in accordance with PMS, RAL, HKS, etc. can also be printed.

## Colour retention

Colour bleeding is minimised by an additive – the anti-soiling characteristics of the fibres are improved considerably.

## Colour fastness














































Our colours are washable, fast to water, friction-resistant and non-fading – in accordance with DIN ISO 105.

## Chromojet

One of our most recent investments is a second Chromojet printing system, which applies the selected motifs permanently to the undyed, tufted mat material and can work with 32 colours simultaneously, using 48 state-of-the-art nozzles per colour and a resolution of 25 dpi. This second printing system has enabled us to achieve a capacity increase of around 200%.



## Colours emco IMAGE and emco IMAGE STYLE

								
Lemon I10	Yellow I20	Yellow-orange I30	Orange I40	Terracotta I50	Red I60	Oxide red I70	Bordeaux I80	Bright red I90
								
Cherry I100	Purple I110	Lilac I120	Grape I130	Magenta I140	Peach I150	Royalblue I160	Light blue I170	Petrol I180
								
Emerald I190	Navy I200	Dark green I210	Mint I220	Leaf green I230	Reed green I240	Green I250	Brown I260	Graphite I270
								
Steelblue I280	Pale blue I290	Silver I300	Fawn I310	Sand I320	Chestnut I330	Grey beige I340	Blue grey I350	Light grey I360
								
Grey I370	Dark grey I380	Black I390	White I400	Steel grey I410	Gold I420	Salmon I430	Light green I440	Sunset I450

## Colours emco IMAGE OUTDOOR



								
Bordeaux OD 9010	Red OD 9011	Dark brown OD 9030	Sand OD 9031	Natural OD 9032	Orange OD 9050	Yellow OD 9051	Black OD 9060	Grey OD 9061
								
Light grey OD 9062	Dark blue OD 9070	Indigo blue OD 9071	Moss green OD 9080	Light green OD 9081	Grass green OD 9082	Petrol blue OD 9083	White OD 9063	

## In-house designers

Individual design requirements can be made a reality directly on our premises thanks to our in-house designers. We will provide you with the necessary expert knowledge - all from a single source. Adaptations and special requests can be implemented at any time, without complicated communication routes.

Simply send us your desired motif or logo as an email file attachment. Mat logos are produced on a PC using Corel Draw and Photoshop software. This is compatible with the file formats cdr, eps, ai and pdf, as well as the image formats jpg, gif, tif and psd; you should ensure that the templates have an image resolution (dpi) between 150 – 200 dpi.

Once we have received your logo template, we will e-mail you a preliminary design in a PDF file. A brief confirmation of our proposed design via e-mail or fax is all we need from you, then we will pass the order on to our production department. You will usually receive your logo mat 11 to 15 days after approving our design.

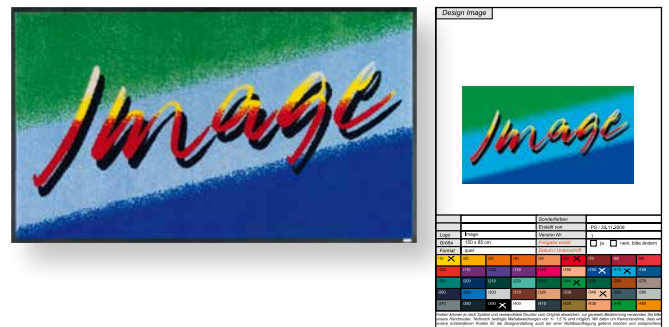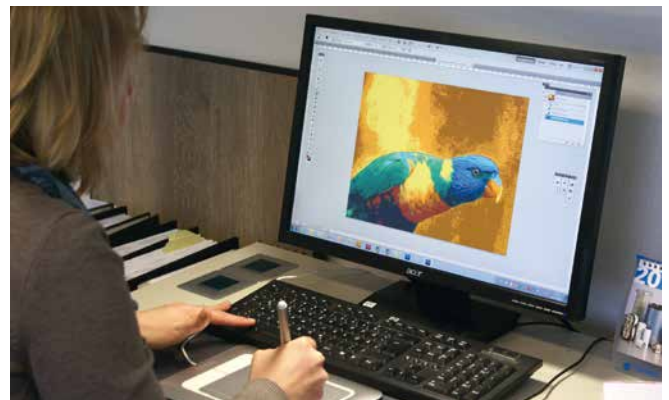

## Special shapes

emco's machine pool now includes a cutting plotter that has been specially developed for cutting the carpet mats into individual shapes. The systems are designed to define each product in accordance with its specific properties (such as colour or design) and transfer this into a detailed cutting template via an appropriate scanning procedure. Thanks to our innovative production technology, alongside the standard geometries with which you will no doubt be familiar, mats can now also be cut into special shapes of any kind (to represent products or company logos, for example).



## emco logo mat designer

Offer your customers more! You can now use the emco logo mat designer yourself to design customized logo mats for your customers in just a few steps: a large variety of designs, faster implementation.



## Labels and positioning

All emco carpet mats feature a label stating the date of manufacture and an emco border label as standard (Fig. 1). emco IMAGE mats also bear two white ID labels (Fig. 2) as standard; these are available on CLASSIC mats on request.

Additional labels can also be provided on emco carpet mats if requested by the customer. These labels may contain company information (logo, telephone number, website address, etc.), inventory data or washing instructions (Fig. 4). (Minimum order quantity 250 units, subject to additional charge.)

emco also offers blank labels (Fig. 1), on which the customer can write whatever they like using a waterproof pen (inventory numbers, sizes, etc.). The labels can be placed in various positions: as a rear label on the mat backing (e.g. Fig. 3, 4, 8) or as a border label on the front of the mat (e.g. Fig. 5 to 7). The labels are permanently attached to the carpet mat's substrate material (e.g. Fig. 2).



▲ Abb. 1



▲ Fig. 2



▲ Fig. 3

Examples of individual carpet mat labels:  
 Fig. 5 – 7: Border label  
 Fig. 3 and 8: Rear label with company inscription  
 Fig. 4: Rear label with washing instructions  
 (All labels shown smaller than actual size)



▲ Fig. 4

▼ Fig. 5



▲ Fig. 6





▲ Fig. 7





Fig. 8 ▶



Portrait

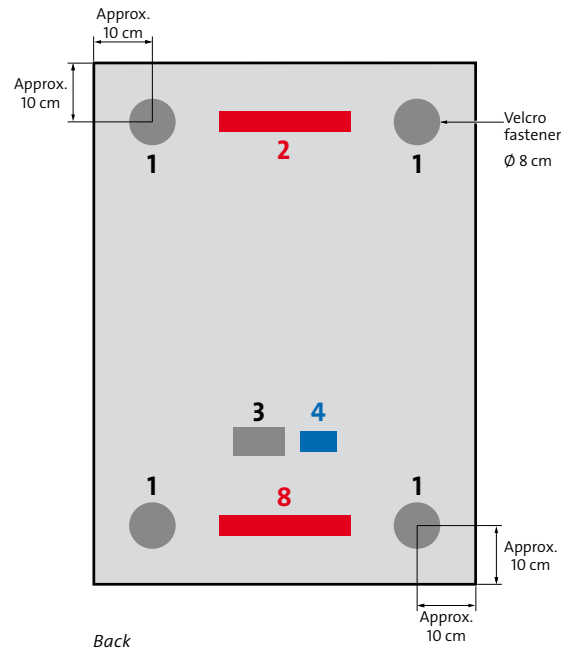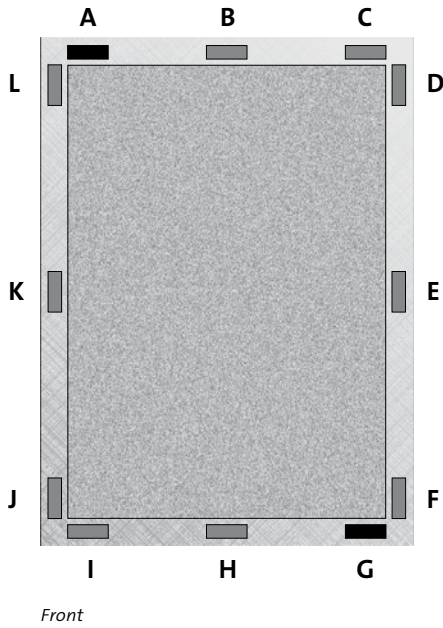

Landscape

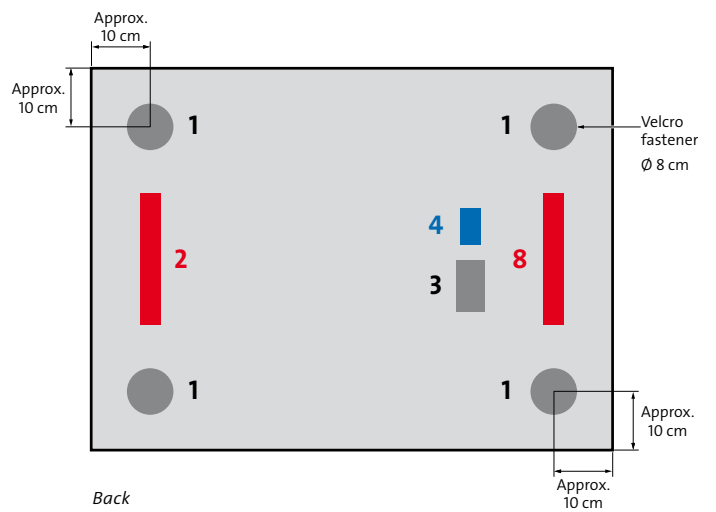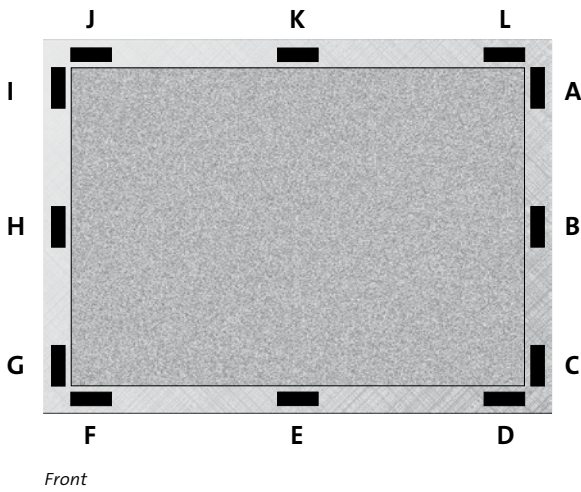

Standard labelling (positions)	Portrait and landscape, reverse
... For ID label – provided as standard on emco IMAGE mats, optional for emco CLASSIC	2/8
... For label stating date of manufacture – provided as standard on all types	4

Position of additional labels on request ...	Portrait, front	Landscape, front	Portrait and landscape, reverse
... emco standard border label	G	D	--
... Two border labels, e.g.	G and A	D and J	--
... Velcro fasteners	--	--	1
... Washing instructions	--	--	3

# emco material, quality and warranty

## Material and quality

Quality requirements are the top priority during development and production, particularly when it comes to customised designs. Not only is the backing or the yarn a crucial factor in this respect, but also the colours and dyeing process used. An emco IMAGE carpet mat is only worthy of the name if it continues to promote a company's image after many years of use, as well as providing a method of keeping an area clean.

Carpet mats from emco are produced exclusively from the most suitable fibres for the job (high twist nylon 100% polyamide 6.6). The height of the fibre makes them especially fluffy, enabling them to absorb a great deal of moisture. The nitrile rubber backing, available with or without dimples, offers long-lasting elasticity and can withstand repeated cleaning and washing, which will not leave any trace. emco IMAGE and CLASSIC are available in flame-resistant versions (Cfl – s1 in accordance with EN 13501, subject to an additional charge). Reinforcement of the borders ensures that they lie flat against the floor and prevents early tears during washing. Quality does not appear out of nowhere – only experience, the best materials and precision will result in an optimum product.

## Flammability

Our carpet mats are available as a flame-resistant version in accordance with Cfl-s1, providing additional safety.




## Areas of use and warranty

The types emco IMAGE, emco IMAGE STYLE and emco CLASSIC are indoor mats, which are only suitable for outdoor use to a limited extent. emco IMAGE OUTDOOR mats were specially developed for use in outdoor areas. All emco mat types are subject to the risk of slipping, caused by exposure to UV light and ozone. This can lead to loss of colour in the mats and to permanent discoloration of the floor covering, which are not covered by the warranty. A regular washing cycle (performed at least every 4 weeks) will prevent this. The conditions of production mean that certain changes in or loss of colour cannot be prevented and cannot, therefore, be included in the warranty. Damage due to malfunctioning of washing machinery or deliberate detrimental acts by the customer are not covered. The large amount of manual work involved means that small deviations in dimensions are unavoidable and do not represent grounds for complaint. In the event of a complaint, compensation can only be made to the current value of the mat. The warranty covers large sections of the pile coming away from the rubber backing, as well as tears to the border.

## Vulcanisation press

State-of-the-art vulcanisation presses are responsible for liquefying the carpet backing, which consists of top-quality nitrile rubber, and bonding it with the individually printed tufting material. Long-term elasticity and a high degree of resistance to atmospheric and chemical influences and mechanical stress then develop under the effects of time, temperature and pressure. The technical specifications of the nitrile rubber are important, since they have a decisive influence on the way in which the mat lies. Here emco makes sure that the highest standards are complied with. Excellent border reinforcement ensures the mat lies perfectly in place.

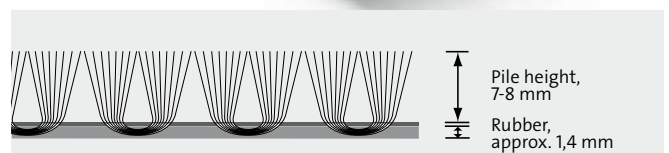

# emco washing and storage

## Washing temperatures and procedure

emco IMAGE: max. 60 °C

emco IMAGE STYLE: max. 60 °C

emco IMAGE OUTDOOR: max. 40 °C

emco CLASSIC: max. 80 °C

Following delivery, mats should be washed or brushed to make the pile stand up and enable the mat to pick up dirt. This process will also improve the high-quality appearance of the mat and make its colours look brighter. The perforation (see page 32 – Benefits that come as standard) may leave individual pile threads standing upright, but the process of washing or brushing the mat will make these threads blend in too.

## Washing and storage

IMAGE mats should not be washed together with other mat types, nor with logo mats produced by other manufacturers, if at all possible. This is because the lower-quality colours used by some manufacturers for their logo mats can sometimes bleed and end up being deposited on other mats.

CLASSIC mats can be washed together with other solution dyed mats, including those produced by other manufacturers, quite safely.

Mats produced without a border (take an additional 10 cm trim margin into account when placing your order) should be washed and dried three to five times prior to fitting, as shrinkage will be unavoidable.

## Recommended detergents

In general, anionic detergents without optical brighteners should be used. Non-alkaline detergents should be used for logo mats, whilst alkaline ones can be used for CLASSIC mats.

## Drying

Please take note of the manufacturer's instructions. A washing temperature of between 65°C and 80°C for around seven minutes is ideal. Then dry for another seven minutes at a lower temperature (approximately 30°C to 40°C).

## Storage

The mats should not be exposed to high temperatures for a long period of time without good reason. Therefore, we recommend removing the mats from the drier as soon as the drying process is finished. Do not fold mats; store them flat, rubber side against pile side. If you store your mats rolled up, always have the rubber side facing outwards.



# The benefits at a glance

Every emco carpet mat offers a number of benefits as standard, which really pay off in day-to-day use. In addition, there is a range of options for you to adapt your carpet mat to your individual requirements.

## Benefits that come as standard

- The very best workmanship; even borders are straight and tidy
- High pile weight, making the mat particularly fluffy and comfortable
- Can be produced in any size, up to a maximum of 200 x 500 cm
- 32 colours per IMAGE mat, from a total of 45 shades
- To create a logo: 24 – 48-hour service
- Short delivery time: Just 11 – 15 days approx.
- Delivery with unmarked packaging possible on request
- No minimum order quantity
- Border reinforcement
- Perforation (Fig. 4): In the interests of durability, all mats are supplied with a perforation (prevents the mat from breaking during washing, provides better drying performance).

## Benefits to customer requirements

- A vast range of shapes available on request (Fig. 1)
- Rounded corners
- Customer-specific border label (Fig. 2)
- Inventory number label (Fig. 4)
- Integration of transponder chips for digital registration of relevant product data (Fig. 3)
- Stamp on reverse (Fig. 5)
- Attachment of Velcro fasteners for fixing the mat in place on smooth floor surfaces (Fig. 6)
- Double-thickness rubber backing (Fig. 7)
- Mats are available with a dimpled backing (Fig. 8) on request. For technical reasons, the dimples are not applied across the entire rear of the mat, just to a certain area. The distance between the dimpled area and the border cannot be specified, due to the variety of mat sizes available.
- Special colours (Pantone or RAL)



1



2



3




4




5



6

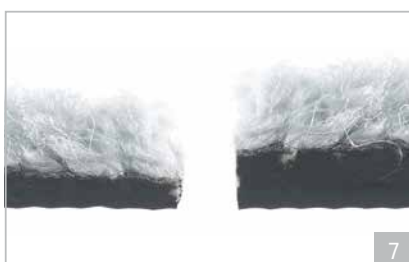

7

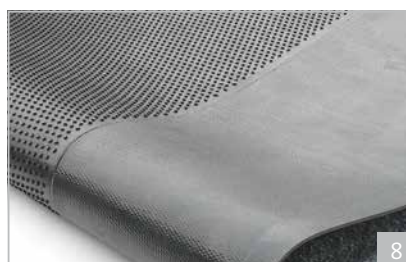

8

Fig. 1: Mat shapes according to requirements

Fig. 2: Border label

Fig. 3: Transponder chips

Fig. 4: Perforation/inventory number label

Fig. 5: Stamp on rear

Fig. 6: Velcro fasteners

Fig. 7: Double-thickness rubber backing

Fig. 8: Dimpled backing



# The company

The emco Group based in Lingen, Germany, is a company which, since its founding in 1945, has stood out thanks to its consistent growth, expertise and innovation.

Its wealth of ideas, entrepreneurial skills and social partnership approach with employees form the basis for the company's continuously positive development trends.

An unmistakable feature of all the products manufactured under the EMCO and NOVUS brand names is the synthesis of practical benefits and exemplary designs.

It is this product quality in terms of both form and function that is helping the company to sustain its global market presence in the new millennium.

emco Bau- und Klimatechnik GmbH & Co. KG  
is a company of




EMCO NOVUS DAHLE emco

## EMCO




**emcobad**  
bathroom equipment



**emcobau**  
building systems



**emco klima**  
air-conditioning engineering



**emcowater**  
water treatment

## NOVUS®



**novus office**  
office technology



**novus fastening**  
fastening technology

## DAHLE



**dahle office**  
office technology

## emco



**emco e-scooter**  
electric scooters

# Fax order form for carpet mats | Number: +49 (0) 591-9140-852

## Brief description of customer

## Customer number

Company:

Department:

Street:

Postcode, town/city:

Contact:

Telephone:

Telefax:

E-mail:

Order number:


Tax number:

## emco carpet mats – Design


Type	Colour	Quantity	Width (cm)	Depth (cm)	Format

- Dimples**
- Embossed sheet** (ID no. \_\_\_\_\_ )
- Border**
- Border label** (standard: emco)  
(if customer-specific, state ID no. here \_\_\_\_\_ )
- Label position** (standard: see drawing\*)

Portrait

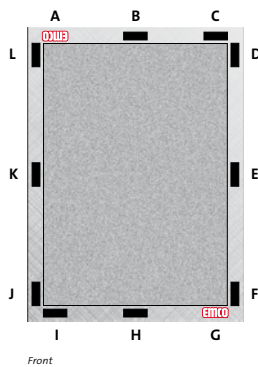

Landscape



*\*If you do not require the standard option, please circle the relevant letters on the drawing.*

- Velcro fasteners**
- ID label**
- Number code/inventory no. label** (if so, specify here: \_\_\_\_\_ )
- Chip** (ID no. \_\_\_\_\_ )
- Rear label** (ID no. \_\_\_\_\_ )  
(if different from layout, please fax a drawing of this along with your order)

Location/date:

Signature/name in block capitals:

# International sales

## Austria

emco Bau- und Klimatechnik  
Vertriebsges.m.b.H.  
Abteilung Bautechnik  
Ausstellungsstr. 6  
2020 Hollabrunn/AT  
Tel. (+43) 029 52 302 60 120  
Fax (+43) 029 52 302 60 21  
wwithalm@emco-bau.at  
www.emco-bau.com

## Switzerland

emco Schweiz AG  
Obfelderstrasse 41 a  
8910 Affoltern a. A./CH  
Tel. (+41) 044 500 35 50  
Fax (+41) 044 500 35 59  
info@emco-schweiz.ch  
www.emco-bau.com

## Great Britain / Northern Ireland

emco UK Ltd.  
5 Plough Road  
Wellington  
Telford  
TF1 1ET  
Tel. (+44) 01952 256 446  
Fax (+44) 01952 262 940  
enquiries@emcouk.co.uk  
www.emco-bau.com

## Netherlands

emco Benelux B.V.  
Divisie Bouwtechniek  
Postbus 66  
5320 AB Hedel/NL  
Baronieweg 12 B  
5321 JW Hedel/NL  
Tel. (+31) 073 599 8310  
Fax (+31) 073 599 8319  
bouwtechniek@benelux.emco.de  
www.emco-bau.com

## Belgium / Luxembourg

emco Benelux B.V.  
Divisie Bouwtechniek  
Veldrijck 2  
8530 Harelbeke/BE  
Tel. (+32) 056 224 978  
Fax (+32) 056 225 879  
bouwtechniek@benelux.emco.de  
www.emco-bau.com

## France

emco France SAS  
8 Rue des Perrières ZI  
39700 Dampierre/FR  
Tel. (+33) 03 84 80 16 20  
Fax (+33) 03 84 80 16 21  
info@emco.fr  
www.emco.fr

## Spain

emco Spain S.L.U.  
Carretera de L'Hospitalet 147-149  
Cityparc Atenas 2º2a  
08940 Cornellà de Llobregat  
(Barcelona)/ES  
Tel. (+34) 932 411 425  
(+34) 902 180 024  
Fax (+34) 932 411 426  
info@es.emco.de  
www.emco-bau.com

## Italy

Andrea Gioco  
Via A. Cardazzo 56/a  
33070 Budoia (PN)/IT  
Tel. (+39) 340 493 51 64  
Fax (+39) 0434 18 20 120  
info@it.emco.de  
www.emco-bau.com

## Poland

emco Polska Sp.z.o.o.  
Ul. Makowskiego 1  
02-784 Warsaw/PL  
Tel./Fax (+48) 22 818 82 36  
info@pl.emco.de  
www.emco-bau.com

## Russia

OOO emco Rus  
Polesky Projezd 16, str. 1, off. 105  
125367 Moscow/RU  
Tel./Fax (+7) 499 940 19 16  
info@ru.emco.de  
www.emco-bau.com

## Slovenia / Croatia

EM Sistemi  
Laznica 1  
5282 Cerklje/SVN  
Tel. (+386) 51 435 159  
info@emco.si  
www.emco.si

## Czech Republic

Novus Česko s.r.o.  
Raspenava 191  
46401 Raspenava/CZ  
Tel. (+420) 482 360 750  
Fax (+420) 482 360 399  
rohozky@novus.cz  
www.emco-bau.com

## Slovakia

Tommar Slovakia s.r.o.  
Lamacská Cesta 111  
84103 Bratislava/SK  
Tel. (+421) 2 64 46 16 16  
Fax (+421) 2 64 46 15 15  
tommar@tommar.sk  
www.emco-bau.com

## Denmark

Scan Agent Kasper Larsen  
Soeborg Hovedgade 100 B 3. TH  
2860 Soeborg / DK  
Tel. (+45) 39 408 331  
Fax. (+45) 35 821 161  
Mobile (+45) 21 847 848  
kasper@scagent.dk  
www.emco-bau.com

## Finland

Oy Hedtec Ab  
Valaistus ja kiinteistötuotteet  
Lauttasaarentie 50  
00200 Helsinki/FI  
Tel. (+358) 0207 638 000  
Fax (+358) 9 673 813  
lighting@hedtec.fi  
www.hedtec.fi

## Greece

emco SA  
5 Douk. Plakentias Str.  
15127 Melissa-Athen/GR  
Tel. (+30) 210 613 83 10  
Fax (+30) 210 613 83 14  
line@emco.gr  
www.emco-bau.com

## Turkey

emco Yapi Ltd. Sti.  
Yigitler Mah. Otosansit 1  
Blok No. 161-169  
16290 Yildirim-Bursa/TR  
Tel. (+90) 0224 342 43 05  
Fax (+90) 0224 342 43 06  
Mobile TR (+90) 554 786 85 06  
Mobile DE (+49) 173 271 53 91  
h.koru@emco.de  
www.emco-bau.com

## Middle East

emco Novus Middle East FZC  
SAIF ZONE  
Bldg. no. L01, office no. 14  
P.O. Box 120058  
Sharjah/UAE  
Mobile UAE (+971) 50 3443 579  
Mobile DE (+49) 170 47 20 296  
rami@kaakarli.de  
www.emco-bau.com

## Central / South America

Euromats Mexico  
Pedro Rivera  
Raudales No. 26  
Lomas de Cocoyoc, Morelos  
C.P. 62738 Mexico/MX  
Tel./Fax (+52) 73 53 56 39 18  
Mobile (+52) 55 51 07 95 24  
info@euromatsmexico.com  
www.emco-bau.com

## Taiwan, R.O.C.

Rainier Collections Inc.  
No.172-1, Sec.5, Roosevelt Road  
Taipei 11681, TW/R.O.C.  
Tel. (+886) 02 8967 1968  
Fax (+886) 02 2935 7691  
rci.rainier@msa.hinet.net  
www.emco-bau.com

## Japan

Bevel Corporation  
S-Court 101, 3-1 Shinanomachi  
Shinjuku-ku  
Tokyo 160-0016/JP  
Tel. (+81) 3 53 41 42 43  
Fax (+81) 3 53 41 42 44  
emco@bevel.co.jp  
www.emco-bau.com

## Singapore

Floorspec Pte Ltd  
No. 7030 Ang Mo Kio Avenue 5  
#04-05/06 Northstar @ AMK  
Singapore 569880  
Tel. (+65) 6484 5550  
Fax (+65) 6484 0170  
info@floorspec.com.sg  
www.floorspec.com.sg

## Hong Kong

emco Novus International Ltd.  
Unit no. 1108, Level 11, Tower 1  
Grand Central Plaza  
138 Shatin Rural Committee Road  
Shatin, New Territories/HK  
Tel. (+852) 215 318 15  
Fax (+852) 215 318 16  
Mobile HK (+852) 53 187 187  
Mobile CN (+86) 152 179 43319  
pyau@hk.emco.de

## China

emco Building Technology  
(Chuzhou) Ltd.  
No. 203 East Jiujiang Road  
Chuzhou City  
239000 Anhui/CN  
Tel. (+86) 503 567 500  
Fax (+86) 503 567 577  
info@china-emco.com  
www.china-emco.com

emco Bau- und Klimatechnik  
GmbH & Co. KG  
Postfach 1860  
D-49803 Lingen (Ems)  
Germany  
Tel. +49 (0) 591 9140-0  
Fax +49 (0) 591 9140-852  
bau@emco.de

[www.emco.de](http://www.emco.de)

emco UK Ltd  
5 Plough Road  
Wellington  
Telford  
TF1 1ET  
Tel. (+44) 01952 256446  
Fax (+44) 01952 262940  
enquiries@emcouk.co.uk

EN-855-4181 / 10.17 – Subject to technical modifications

A member of the  **EMCO**  
Group