


Model 22 SPIN/G



Description

Roll-up, hard-wearing entrance mat for supported or self-supporting laying. Fitted with small (122 mm) or large (300 mm) stainless steel tiles for tactile guidance. Each tile occupies three aluminium profile bars. Mat is produced to fit width perfectly; depth obtained using spacing increments of 100 mm. Option of dimpled tiles for attention panel.

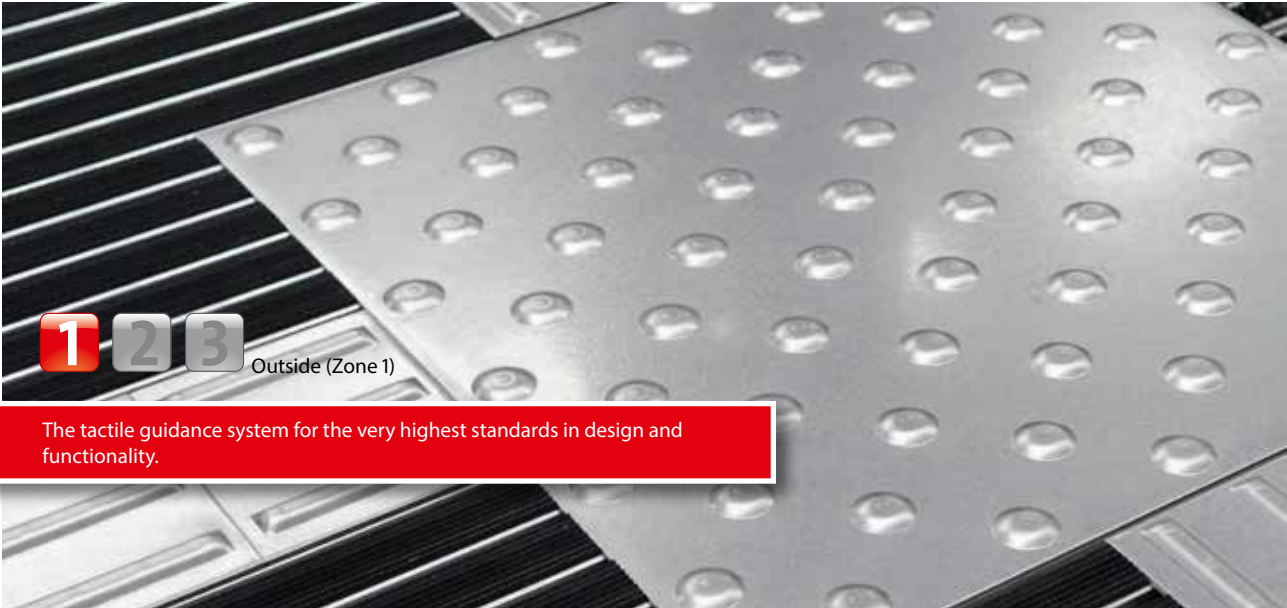

Inside and outside (covered, Zone 2)



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, loose chippings, coarse sand, small gravel particles



The emco entrance mat as a guidance system for the visually impaired

Colours



black

Model 22 SPIN/G

Approx. height (mm)	23,5
Roll-over and drive-over capability:	Wheelchairs Prams Light shopping trolleys hand trolleys
Standard profile clearance approx. (mm)	5 mm, rubber spacers
Connection	Plastic-coated steel cable
Max. width/profile length for individual section (mm):	1200
Depth/walking depth for individual section (mm):	800
Weight (kg/m²)	27,7
Support chassis	Reinforced support chassis made using rigid aluminium with sound absorbing insulation on the underside
Tread surface	Recessed, robust, weather-proof profiled rubber inserts. Combined with stainless steel tiles for optimum way guidance for the blind and visually impaired (acc. to DIN 32984) in the entrance area.
Slip resistance	slip-resistance property of the rubber insert: R 9 in accordance with DIN 51130, slip-resistance property of the stainless steel tile: R 9 in accordance with DIN 51130

Suitable for:
Residential and care homes
Arena
medical practice
Train station
DIY store
Offices and administrative buildings
Family home
Shopping centre
Retail sector
University / Higher education institution
airport
Hotel
Industry
Kindergarten/Nursery
Clinic/Hospital
Warehouse
Apartment building
Trade fair
School
Sports hall
Supermarket

Model 22 SPIN/G

Service and services

Construction site advice

Dimensioning

Measured using laser measuring device on site.

Installation service

Fitting and installation service

Cleaning by mobile mat cleaning system

Repairs

The product can be disposed of or recycled in an environmentally friendly way.

Accessories

emco installation frame 500: 500-25 AL Aluminium

emco installation frame 500: 500-25 CN Chrome-nickel steel (V2A)

emco installation frame 500: 500-25 MS Natural brass

emco LUMINA: LUMINA + LED Aluminium

emco cover strip: C22 Chrome-nickel steel (V2A)

emco dirt collection well: 5000 AL Aluminium

emco dirt collection well: 5022 AL Aluminium

emco dirt collection well: 5000 CN Chrome-nickel steel (V2A)

emco dirt collection well: 5022 CN Chrome-nickel steel (V2A)

emco special frame with substructure: A Version A: with installation frame, rectangular tube profiles, grid support and height adjustment.

emco special frame with substructure: B Version B: with installation frame, grid support and rectangular tube profiles

emco special frame with substructure: C Type C: with installation frame and rectangular tube profiles

Mat joining brackets: MV Supplied as standard with mats in several parts

Rubber underlay 1 mm: GU 1

Rubber underlay 3 mm: GU 3

Rubber underlay 5 mm: GU 5

Subject to technical modifications