


# Model 22 SPIN/R



1 2 3 Inside and outside (covered, Zone 2)

The tactile guidance system for the very highest standards in design and functionality.

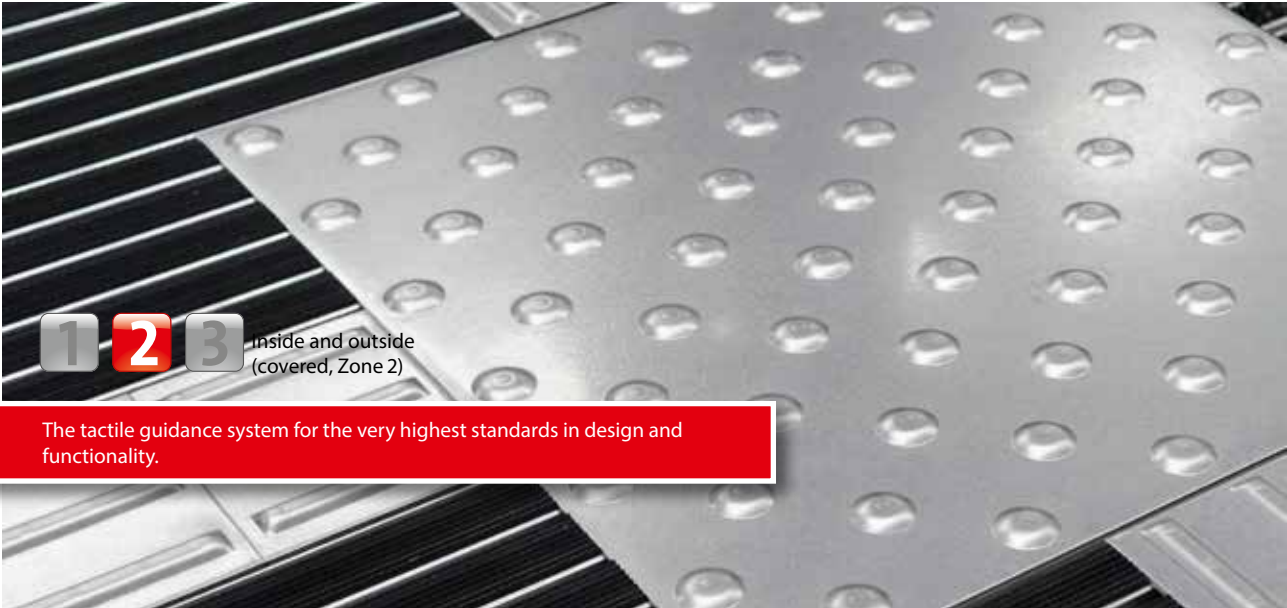

### Description

Roll-up, hard-wearing entrance mat for supported or self-supporting laying. Fitted with small (122 mm) or large (300 mm) stainless steel tiles for tactile guidance. Each tile occupies three aluminium profile bars. Mat is produced to fit width perfectly; depth obtained using spacing increments of 100 mm. Option of dimpled tiles for attention panel.



Inside and outside (covered, Zone 2)



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, etc.



The emco entrance mat as a guidance system for the visually impaired



R 11 slip resistance as per DIN 51130

### Colours



Anthracite no. 200

## Model 22 SPIN/R

<b>Approx. height (mm)</b>	23,5
<b>Roll-over and drive-over capability:</b>	Wheelchairs Prams hand trolleys Light shopping trolleys
<b>Standard profile clearance approx. (mm)</b>	5 mm, rubber spacers
<b>Connection</b>	Plastic-coated steel cable
<b>Max. width/profile length for individual section (mm):</b>	1200
<b>Depth/walking depth for individual section (mm):</b>	800
<b>Weight (kg/m<sup>2</sup>)</b>	27,7
<b>Support chassis</b>	Reinforced support chassis made using rigid aluminium with sound absorbing insulation on the underside
<b>Tread surface</b>	Recessed, robust, weather-proof coarse-fibre ribbed carpet strips (brand-name fibres) for even better dirt removal. Combined with stainless steel tiles for optimum way guidance for the blind in the entrance area.
<b>Slip resistance</b>	slip-resistance property of coarse-fibre ribbed carpet strips: R 11 in accordance with DIN 51130, slip-resistance property of the stainless steel tile: R 9 in accordance with DIN 51130
<b>Colour fastness to artificial light ISO 105-B02</b>	good 6
<b>Colour fastness to rubbing ISO 105 X12</b>	good 4
<b>Colour fastness to water ISO 105 E01</b>	good 5

<b>Suitable for:</b>
Residential and care homes
Arena
medical practice
Train station
DIY store
Offices and administrative buildings
Family home
Shopping centre
Retail sector
University / Higher education institution
airport
Hotel
Industry
Kindergarten/Nursery
Clinic/Hospital
Warehouse
Apartment building
Trade fair
School
Sports hall
Supermarket

## Model 22 SPIN/R

Service and services	Accessories
Construction site advice	emco installation frame 500: 500-25 AL Aluminium
Dimensioning	emco installation frame 500: 500-25 CN Chrome-nickel steel (V2A)
Measured using laser measuring device on site.	emco installation frame 500: 500-25 MS Natural brass
Installation service	emco LUMINA: LUMINA + LED Aluminium
Fitting and installation service	emco cover strip: C22 Chrome-nickel steel (V2A)
Cleaning by mobile mat cleaning system	emco dirt collection well: 5000 AL Aluminium
Ribbed carpet strips can be subsequently replaced on site by a emco service engineer (mobile ribbed carpet replacement machine).	emco dirt collection well: 5022 AL Aluminium
Repairs	emco dirt collection well: 5000 CN Chrome-nickel steel (V2A)
The product can be disposed of or recycled in an environmentally friendly way.	emco dirt collection well: 5022 CN Chrome-nickel steel (V2A)
	emco special frame with substructure: A Version A: with installation frame, rectangular tube profiles, grid support and height adjustment.
	emco special frame with substructure: B Version B: with installation frame, grid support and rectangular tube profiles
	emco special frame with substructure: C Type C: with installation frame and rectangular tube profiles
	Mat joining brackets: MV Supplied as standard with mats in several parts
	Rubber underlay 1 mm: GU 1
	Rubber underlay 3 mm: GU 3
	Rubber underlay 5 mm: GU 5

Subject to technical modifications