


Model 5000 AL



emco dirt collection wells are required to counter the increased dirt levels in heavily frequented entrance areas. Together with the more resilient entrance mats emco MARSCHALL (not in combination with a scraper bar or brush strip) and emco PLAZA, they form a unit that cannot be surpassed in terms of cleaning efficiency and practicality.

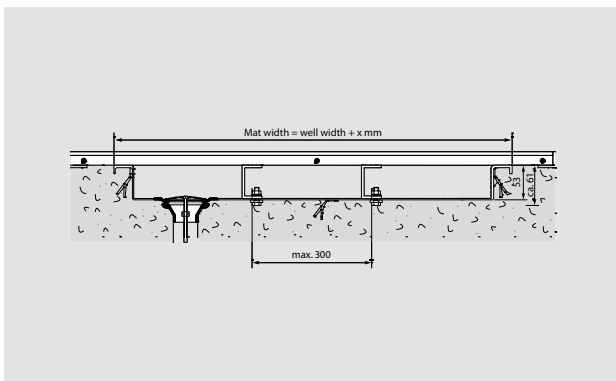

Description

Dirt collection wells developed for use with the emco MARSCHALL, emco PLAZA and emco SENATOR WS entrance mats ensure increased dirt uptake. Can be supplied with a drainage system.



Outside
(Zone 1)



Inside and
outside (co-
vered, Zone 2)



Street dust,
hair, sand,
ash, textile
fibres, small
leaves and
twigs, loose
chippings,
coarse sand,
small gravel
particles



Street dust,
hair, sand, ash,
textile fibres,
small leaves
and twigs, etc.



Damp street
dust, damp
sand deposits,
dust, etc.



Model 5000 AL

Weight (kg/m²)	13,0
Description	Dirt collection wells developed for use with the emco MARSCHALL, emco PLAZA and emco SENATOR WS entrance mats ensure increased dirt uptake. Can be supplied with a drainage system.
Technical details	Max. one-piece tray segment 2800 x 1300 mm.
Structure	A dirt collection well unit can be built up in modules consisting of either a single well or multiple wells which may vary in width and depth. From a visual and functional perspective, the entrance mat is commonly manufactured with a frame.
Freedom to create your own individual design	In spite of the rectangular shape of the wells, no limits are placed on your creativity when it comes to tailoring the mat to your own specifications. Architecturally inviting entrances demand a harmoniously integrated entrance mat. In these cases, the wells are often only used in areas where the greatest amounts of dirt occur, and the entrance mats far exceed what is required.
Material	Aluminium (AlMg 1), bonded and waterproof, interior completely smooth for easy cleaning. Also available in stainless steel (V2A) on request.
Support profile	Aluminium (AlMgSi 0.5), stainless steel (V2A), max. spacing 300 mm with recesses for all-around water drainage. These profiles must run laterally at an angle of 90° beneath the profiles.
Additional data	Without surrounding edging frame for the entrance mat. MARSCHALL type 517 S / 522 S and PLAZA type 542 S are larger due to their special design and can be fitted with an additional frame on request.
Larger dimensions	Several well components are screwed together on site to form a single system.
Fittings	With welded wall anchors; drainage system available on request.
Drainage system	Complete drainage system, consisting of a flat outlet (Ø 80 mm) made from stainless steel, and a plastic lower part for subsequent connection to the drainage system (Ø 1 1/2 inches).
Well height (mm)	53
Well installation height (mm)	61
Max. well width, one piece (mm)	2800
Max. well depth, one piece (mm)	1300
Model	5000 AL

Subject to technical modifications