


Model 515 R



1 **2** **3** Inside and outside (covered, Zone 2)

The specialist for entrances with security tagging equipment. Ideal for picking up fine dirt.

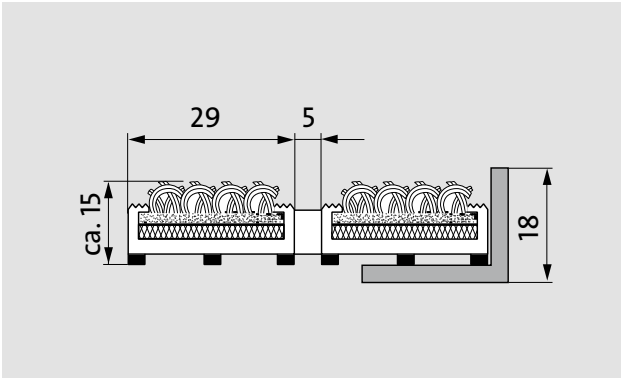

Description

Roll-up, extremely hard-wearing entrance mat for laying on the floor. Mats produced to fit width and walking depth specifications perfectly, without the need for alignment profiles. Any geometric shape is available.



Inside and outside (covered, Zone 2)



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, etc.



Colours



Light grey no. 220



Anthracite no. 200



Beige no. 420



Blue no. 114

Model 515 R

Approx. height (mm)	15
Roll-over and drive-over capability:	Wheelchairs Prams Light shopping trolleys hand trolleys
Standard profile clearance approx. (mm)	5 mm, rubber spacers
Connection	Plastic-coated stainless steel cable
Max. width/profile length for individual section (mm):	2600
Depth/walking depth for individual section (mm):	1500
Weight (kg/m²)	06,2
Mat divisions as per factory standards or customer specifications	As of a profile length of 2600 mm or a maximum mat weight of 30 kg
Support chassis	Made from light grey, high-quality hard plastic, underside with built-in non-slip soft plastic strips (temperature resistant up to approx. 40 °C.
Tread surface	Recessed, robust, weather-proof, ribbed carpet strips.
Slip resistance	R 11 slip resistance as per DIN 51130

emco KADETT With ribbed carpet insert

Model 515 R

Service and services

Construction site advice

Measured using laser measuring device on site.

Fitting and installation service

The product can be disposed of or recycled in an environmentally friendly way.

Accessories

emco installation frame 500: 500-18 AL Aluminium

Rubber underlay 1 mm: GU 1

Rubber underlay 3 mm: GU 3

Rubber underlay 5 mm: GU 5

Mat joining brackets: MV Supplied as standard with mats in several parts

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems) ·
Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email: bau@emco.de
· www.emco-bau.com

