



# emco RADIAL With ribbed carpet insert

## Model 522 RDR

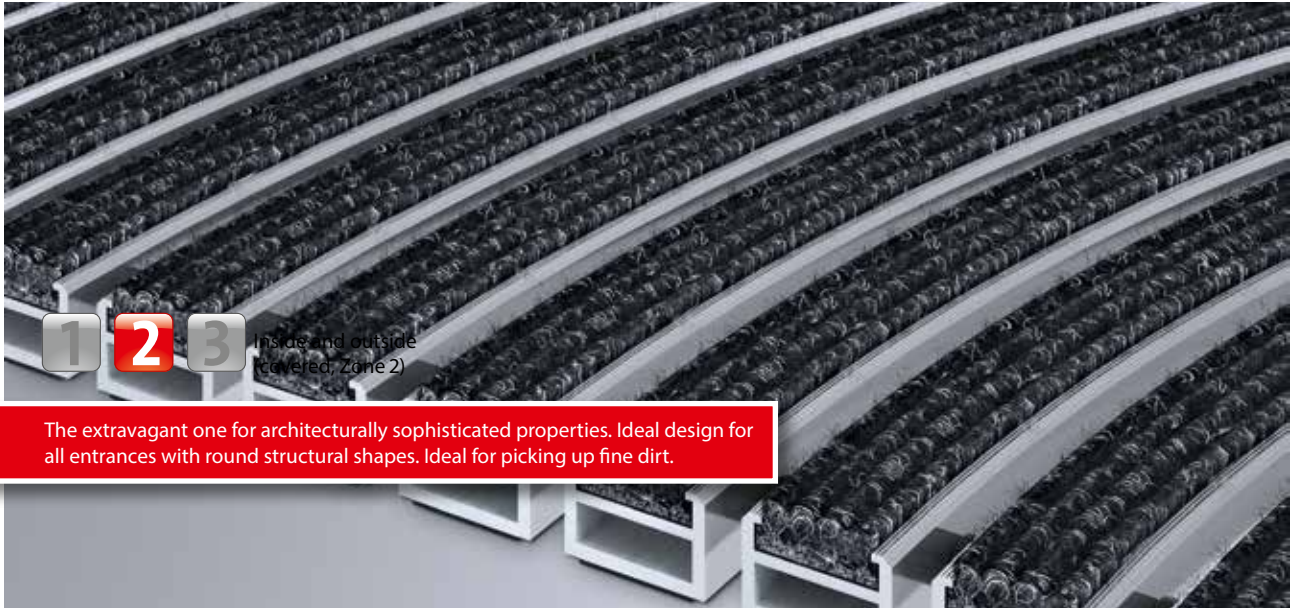

1 2 3 Inside and outside covered, Zone 2

The extravagant one for architecturally sophisticated properties. Ideal design for all entrances with round structural shapes. Ideal for picking up fine dirt.

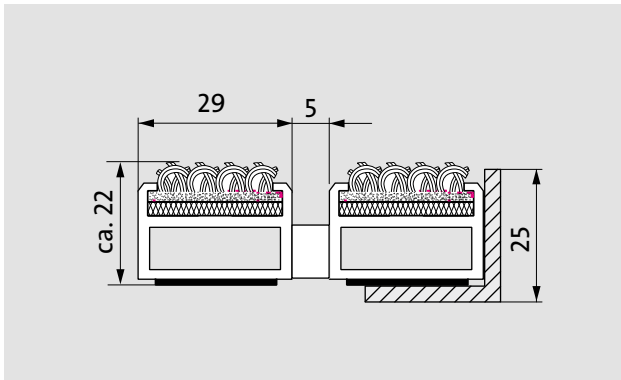

### Description

Hard-wearing, radial curved entrance mat. Installation frame and entrance mat as a single unit, for laying on the floor. Can be rolled over and also driven over by fork lifts and goods vehicles. Mats produced to fit width and walking depth specifications perfectly, without the need for alignment profiles. Smallest bending radius 600 mm.



Inside and outside covered (covered, Zone 2)



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, etc.



Extremely durable



Flammability in accordance with European standard Cf1-s1. (Tested by the Textiles & Flooring Institute GmbH).



### Colours



Light grey no. 220



Anthracite no. 200



Red no. 305



Brown no. 485



Sand no. 430



## emco RADIAL With ribbed carpet insert

---

### Model 522 RDR

<b>Approx. height (mm)</b>	22
<b>Roll-over and drive-over capability:</b>	Wheelchairs Prams Light shopping trolleys hand trolleys Cars pallet trucks
<b>Standard profile clearance approx. (mm)</b>	5 mm, rubber spacers
<b>Automatic door systems</b>	Profile clearance of 3 mm available as an option for revolving door drives, in accordance with EN 16005
<b>Connection</b>	Threaded stainless steel rod
<b>Max. width/profile length for individual section (mm):</b>	3000
<b>Depth/walking depth for individual section (mm):</b>	980
<b>Weight (kg/m<sup>2</sup>)</b>	16,8
<b>Mat divisions as per factory standards or customer specifications</b>	As of a profile length of 3000 mm or a maximum mat weight of 45 kg
<b>Support chassis</b>	Made using rigid aluminium with sound absorbing insulation on the underside
<b>Tread surface</b>	Recessed, robust, weather-proof, ribbed carpet strips.
<b>Flammability</b>	Insert for Light Grey and Anthracite ribbed carpet colours available with fire classification Cf1-s1 as per EN 13501.
<b>Colour fastness to artificial light ISO 105-B02</b>	good 6
<b>Colour fastness to rubbing ISO 105 X12</b>	good 4
<b>Colour fastness to water ISO 105 E01</b>	good 5

## emco RADIAL With ribbed carpet insert

---

# Model 522 RDR

### Service and services

Construction site advice

Measured using laser measuring device on site.

Fitting and installation service

Ribbed carpet strips can be subsequently replaced on site by a emco service engineer (mobile ribbed carpet replacement machine).

The product can be disposed of or recycled in an environmentally friendly way.

### Accessories

emco installation frame 500: 500-25 AL Aluminium

emco installation frame 500: 500-25 CN Chrome-nickel steel (V2A)

emco installation frame 500: 500-25 MS Natural brass

emco T-profile: T22

Mat joining brackets: MV Supplied as standard with mats in several parts

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems) ·  
Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email: bau@emco.de  
· www.emco-bau.com

