


# emco MARSCHALL With rubber insert

## Model 522 TLS S/G



The emco entrance mat as a guidance system for the visually impaired

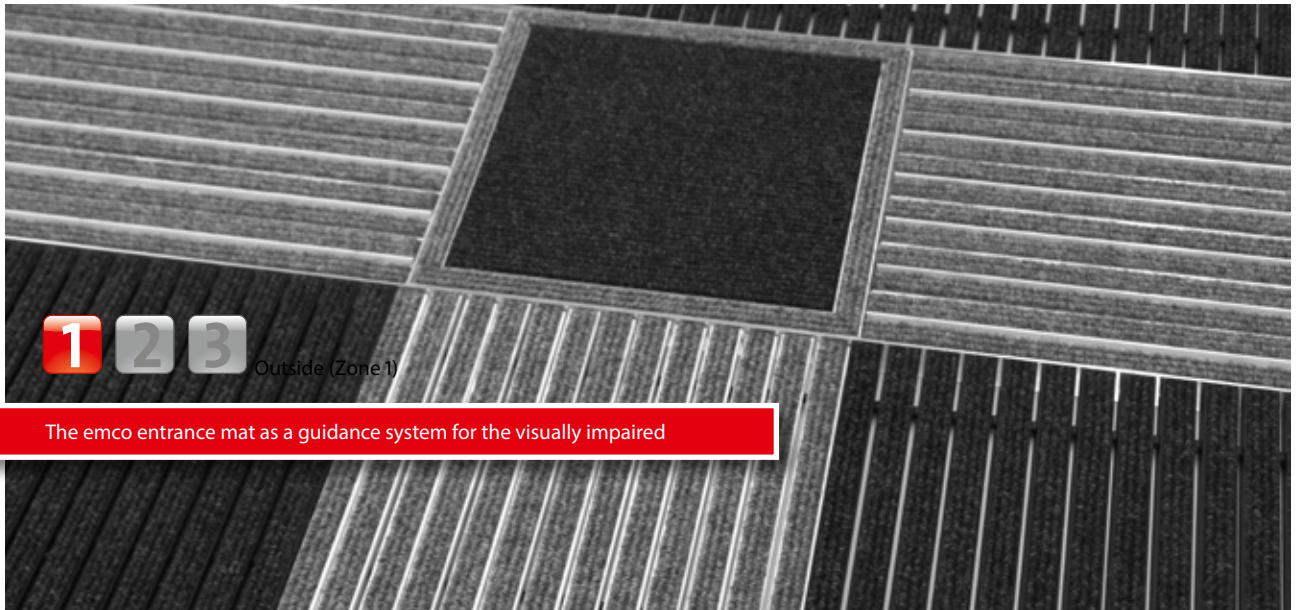

### Description

The emco guidance system for the visually impaired is tactile and comes in high-contrast colours with different profile heights and profiles that run longitudinally to the direction of traffic, enabling blind and visually impaired people to find doors, stairs, lifts etc. as well as providing orientation in larger areas. Ideal guidance with cleaning effect through the entrance to the building. The guidance system also draws attention to obstacles and possible dangers. The floor guidance system can also facilitate orientation for people with no visual impairment. Optionally available with textured ground surface indicators and painted aluminium profiles.



Outside (Zone 1)



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, loose chippings, coarse sand, small gravel particles



The emco entrance mat as a guidance system for the visually impaired




Extremely durable



Flammability in accordance with European standard Cfl-s1. (Tested by the Textiles & Flooring Institute GmbH).

### Colours



black

## Model 522 TLS S/G

<b>Approx. height (mm)</b>	22
<b>Roll-over and drive-over capability:</b>	Wheelchairs Prams Light shopping trolleys hand trolleys Cars pallet trucks
<b>Standard profile clearance approx. (mm)</b>	3 mm, rubber spacers
<b>Connection</b>	With threaded rod
<b>Max. width/profile length for individual section (mm):</b>	3000
<b>available in the following widths (mm)</b>	225, 290, 355, 420, 485, 550, 615 (alle Angaben in mm)
<b>Depth/walking depth for individual section (mm):</b>	3000
<b>Weight (kg/m<sup>2</sup>)</b>	14,4
<b>Mat divisions as per factory standards or customer specifications</b>	As of a profile length of 3000 mm or a maximum mat weight of 45 kg
<b>Support chassis</b>	made of rigid aluminium with sound insulation underlay. In the area of the tactile guidance system, the profiles are laid alternately in two heights. White and black aluminium profiles available.
<b>Tread surface</b>	Recessed, robust, weather-proof profiled rubber inserts.

<b>Suitable for:</b>
Residential and care homes
Arena
medical practice
Train station
DIY store
Offices and administrative buildings
Family home
Shopping centre
Retail sector
University / Higher education institution
airport
Hotel
Industry
Kindergarten/Nursery
Clinic/Hospital
Warehouse
Apartment building
Trade fair
School
Sports hall
Supermarket

## Model 522 TLS S/G

### Service and services

Construction site advice

Measured using laser measuring device on site.

Fitting and installation service

The product can be disposed of or recycled in an environmentally friendly way.

### Accessories

emco installation frame 500: 500-25 AL Aluminium

emco installation frame 500: 500-25 CN Chrome-nickel steel (V2A)

emco installation frame 500: 500-25 MS Natural brass

Rubber underlay 1 mm: GU 1

Rubber underlay 3 mm: GU 3

Rubber underlay 5 mm: GU 5

emco special frame with substructure: A Version A: with installation frame, rectangular tube profiles, grid support and height adjustment.

emco special frame with substructure: B Version B: with installation frame, grid support and rectangular tube profiles

emco special frame with substructure: C Type C: with installation frame and rectangular tube profiles

Mat joining brackets: MV Supplied as standard with mats in several parts

Subject to technical modifications