




Model 522 TLS S/R

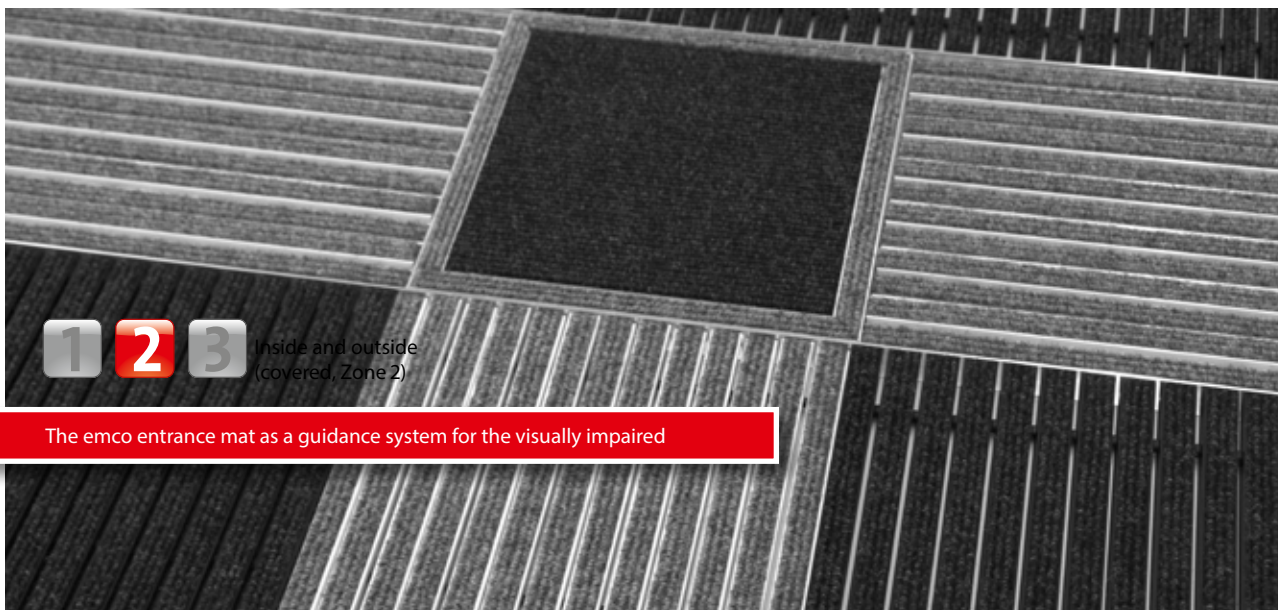

1 2 3 Inside and outside (covered, Zone 2)

The emco entrance mat as a guidance system for the visually impaired



Description

The emco guidance system for the visually impaired is tactile and comes in high-contrast colours with different profile heights and profiles that run longitudinally to the direction of traffic, enabling blind and visually impaired people to find doors, stairs, lifts etc. as well as providing orientation in larger areas. Ideal guidance with cleaning effect through the entrance to the building. The guidance system also draws attention to obstacles and possible dangers. The floor guidance system can also facilitate orientation for people with no visual impairment. Optionally available with textured ground surface indicators and painted aluminium profiles.



Inside and outside (covered, Zone 2)



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, etc.



The emco entrance mat as a guidance system for the visually impaired



Extremely durable



Colours



Light grey no. 220



Anthracite no. 200

emco MARSCHALL With ribbed carpet insert

Model 522 TLS S/R

Approx. height (mm)	22
Roll-over and drive-over capability:	Wheelchairs Prams Light shopping trolleys hand trolleys pallet trucks Cars
Standard profile clearance approx. (mm)	3 mm, rubber spacers
Connection	With threaded rod
Max. width/profile length for individual section (mm):	3000
available in the following widths (mm)	225, 290, 355, 420, 485, 550, 615 (alle Angaben in mm)
Depth/walking depth for individual section (mm):	3000
Weight (kg/m²)	9,6
Mat divisions as per factory standards or customer specifications	As of a profile length of 3000 mm or a maximum mat weight of 45 kg
Support chassis	made of rigid aluminium with sound insulation underlay. In the area of the tactile guidance system, the profiles are laid alternately in two heights. White and black aluminium profiles available.
Tread surface	Recessed, robust, weather-proof coarse fibre ribbed carpet strips (brand-name fibres) for even better dirt removal.
Pile material	100% PP (polypropylene)
Colour fastness to artificial light ISO 105-B02	good 6
Colour fastness to rubbing ISO 105 X12	good 4
Colour fastness to water ISO 105 E01	good 5

Suitable for:
Residential and care homes
Arena
medical practice
Train station
DIY store
Offices and administrative buildings
Family home
Shopping centre
Retail sector
University / Higher education institution
airport
Hotel
Industry
Kindergarten/Nursery
Clinic/Hospital
Warehouse
Apartment building
Trade fair
School
Sports hall
Supermarket

emco MARSCHALL With ribbed carpet insert

Model 522 TLS S/R

Service and services

Construction site advice

Measured using laser measuring device on site.

Fitting and installation service

The product can be disposed of or recycled in an environmentally friendly way.

Accessories

emco installation frame 500: 500-25 AL Aluminium

emco installation frame 500: 500-25 CN Chrome-nickel steel (V2A)

emco installation frame 500: 500-25 MS Natural brass

Rubber underlay 1 mm: GU 1

Rubber underlay 3 mm: GU 3

Rubber underlay 5 mm: GU 5

Mat joining brackets: MV Supplied as standard with mats in several parts

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems) ·
Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email: bau@emco.de
· www.emco-bau.com

