


emco PLAZA With cassette brush

Model 542 SCB



The toughest of all the robust weather-proof solutions available. For picking up significant amounts of coarse soiling in heavily frequented buildings.

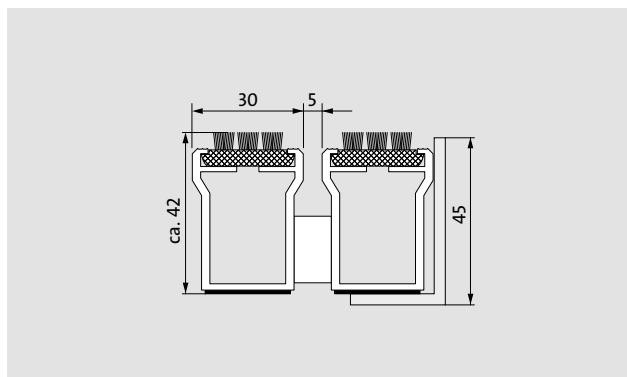

Description

Roll-up, extremely hard-wearing entrance mat for heavy loads, for supported and self-supporting laying. Can be rolled over and also driven over by pallet trucks and goods vehicles. The special profile shape and height enable more dirt to be collected between the profiles. Mats produced to fit width and walking depth specifications perfectly, without the need for adjustment profiles. Any geometric shape is available, cut through the bristle bundles if necessary.



Outside
(Zone 1)




Street dust,
hair, sand,
ash, textile
fibres, small
leaves and
twigs, loose
chippings,
coarse sand,
small gravel
particles



Extremely
durable

Colours



Bristle bundles
in grey



Bristle bundles
in black

emco PLAZA With cassette brush

Model 542 SCB

Approx. height (mm)	42
Roll-over and drive-over capability:	Wheelchairs Prams hand trolleys pallet trucks Cars HGVs (up to 7.5 t.)
Standard profile clearance approx. (mm)	5 mm, rubber spacers
Connection	Plastic-coated steel cable
Max. width/profile length for individual section (mm):	2800
Depth/walking depth for individual section (mm):	1000
Weight (kg/m²)	27,7
Mat divisions as per factory standards or customer specifications	As of a profile length of 2800 mm or a maximum mat weight of 45 kg
Support chassis	Thick-walled, rigid aluminium with impact sound insulation underlay
Tread surface	Recessed, robust, weather-proof cassette sections, equipped with brush bundles arranged parallel to one another. Actual mat height: +1 to 2 mm.
Flammability	Complete mat system (only with black brush bundles) available with fire classification Cfl-s1 in accordance with EN 13501 (tested by the Textiles & Flooring Institute GmbH).

emco PLAZA With cassette brush

Model 542 SCB

Service and services	Accessories
Construction site advice	emco installation frame 500: 500-46 AL Aluminium
Measured using laser measuring device on site.	emco installation frame 500: 500-46 CN Chrome-nickel steel (V2A)
Fitting and installation service	emco cover strip: C42 Chrome-nickel steel (V2A)
The product can be disposed of or recycled in an environmentally friendly way.	emco dirt collection well: 5000 AL Aluminium
	emco dirt collection well: 5042 AL Aluminium
	emco dirt collection well: 5000 CN Chrome-nickel steel (V2A)
	emco dirt collection well: 5042 CN Chrome-nickel steel (V2A)
	emco special frame with substructure: A Version A: with installation frame, rectangular tube profiles, grid support and height adjustment.
	emco special frame with substructure: B Version B: with installation frame, grid support and rectangular tube profiles
	emco special frame with substructure: C Type C: with installation frame and rectangular tube profiles
	Rubber underlay 1 mm: GU 1
	Rubber underlay 3 mm: GU 3
	Rubber underlay 5 mm: GU 5
	Mat joining brackets: MV Supplied as standard with mats in several parts

Subject to technical modifications