



emco special frame with substructure

Model B

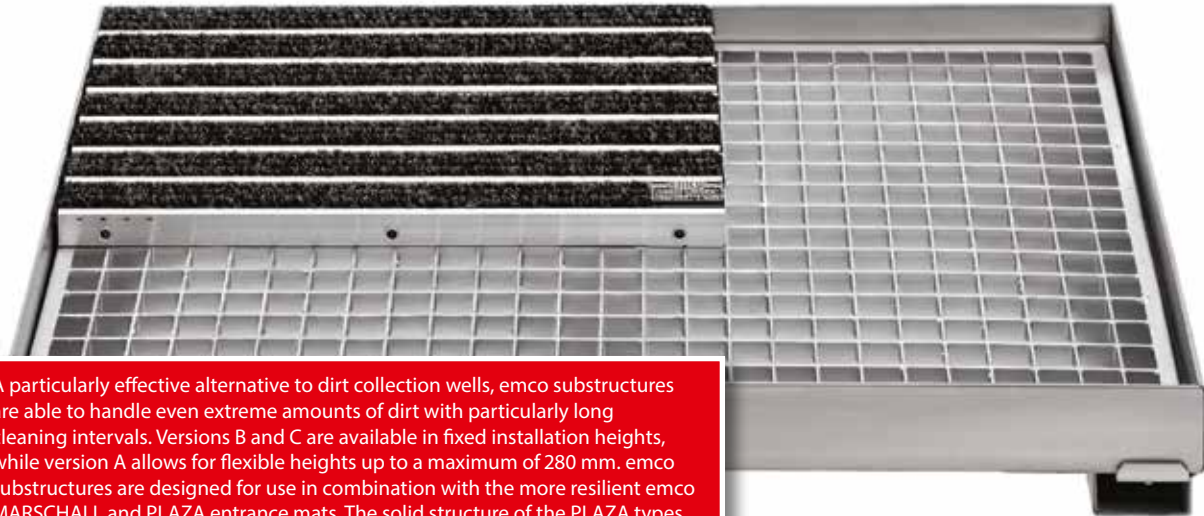

A particularly effective alternative to dirt collection wells, emco substructures are able to handle even extreme amounts of dirt with particularly long cleaning intervals. Versions B and C are available in fixed installation heights, while version A allows for flexible heights up to a maximum of 280 mm. emco substructures are designed for use in combination with the more resilient emco MARSCHALL and PLAZA entrance mats. The solid structure of the PLAZA types allows them to be laid without a grid.

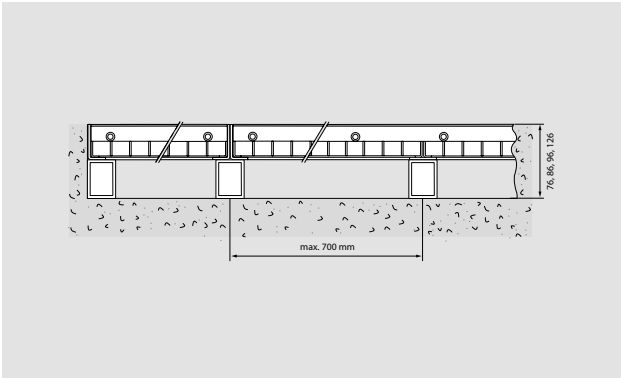

Description

Structure: The installation frames consist of angled profiles (stainless steel) with mitred corners that are screwed into place using gusset plates. Extensive widths can be separated by using two angled profiles screwed together. The frames are supplied with wall anchors.



Outside (Zone 1)



Inside and outside (covered, Zone 2)

Model B

Installation frame material	1.4301 (V2A)
Frame dimensions (H x W x D) in mm	46 x 25 x 3
Construction heights in mm	76 mm (30 x 40 x 2 mm rectangular tube) 86 mm (40 x 30 x 2 mm rectangular tube) 96 mm (50 x 50 x 2 mm square tube) 126 mm (80 x 40 x 2 mm rectangular tube)
Distance in mm	700
Description	Structure: The installation frames consist of angled profiles (stainless steel) with mitred corners that are screwed into place using gusset plates. Extensive widths can be separated by using two angled profiles screwed together. The frames are supplied with wall anchors.
Technical details	Supporting substructure (hot-dip galvanised), consisting of grids and box section screwed to the underside.
Height (mm)	76, 86, 96, 126
Model	B

Subject to technical modifications