


Model GS 17 G



The alternative system with a closed design for extremely heavily frequented buildings. Ideal for picking up coarse dirt

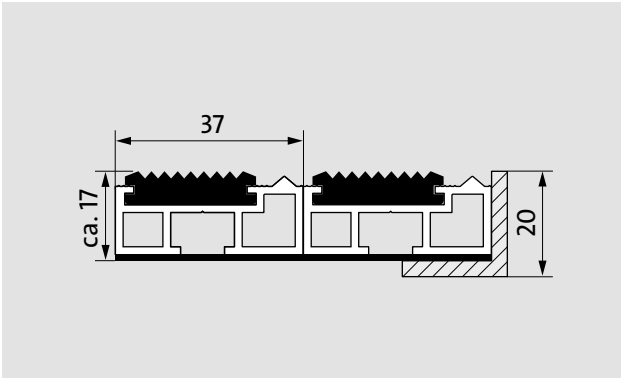

Description

Closed, hard-wearing entrance mat with integrated scraper bar, for laying on the floor. Any geometric shape is available.



Outside (Zone 1)



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, loose chippings, coarse sand, small gravel particles



Extremely durable

Colours



black

emco GS17 With rubber insert

Model GS 17 G

Approx. height (mm)	17
Roll-over and drive-over capability:	Wheelchairs Prams Light shopping trolleys hand trolleys Cars pallet trucks
Standard profile clearance approx. (mm)	0 mm, closed system
Connection	Plastic-coated steel cable
Max. width/profile length for individual section (mm):	2000
Depth/walking depth for individual section (mm):	800
Weight (kg/m²)	17,4
Mat divisions as per factory standards or customer specifications	As of a profile length of 2000 mm or a maximum mat weight of 45 kg
Support chassis	Made using rigid aluminium with sound absorbing insulation on the underside
Tread surface	Recessed, robust, weather-proof profiled rubber inserts.

Model GS 17 G

Service and services

Construction site advice

Measured using laser measuring device on site.

Fitting and installation service

Cleaning by mobile mat cleaning system

The product can be disposed of or recycled in an environmentally friendly way.

Accessories

emco installation frame 500: 500-20 AL Aluminium

emco installation frame 500: 500-20 CN Chrome-nickel steel (V2A)

Rubber underlay 1 mm: GU 1

Rubber underlay 3 mm: GU 3

Rubber underlay 5 mm: GU 5

Mat joining brackets: MV Supplied as standard with mats in several parts

Subject to technical modifications