


emco GS17 With ribbed carpet insert

# Model GS 17 R



**1** **2** **3** Inside and outside (covered, Zone 2)

The alternative system with a closed design for extremely heavily frequented buildings. Ideal for picking up fine dirt.

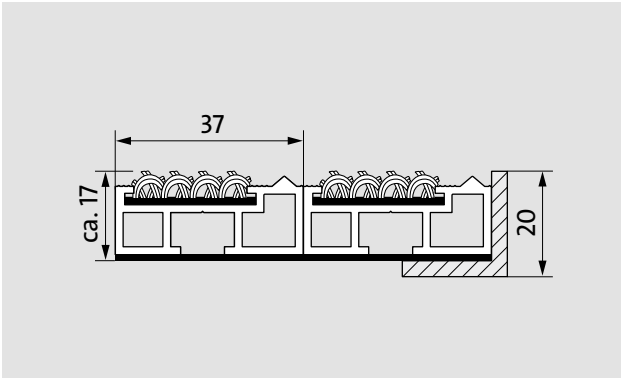

### Description

Closed, hard-wearing entrance mat with integrated scraper bar, for laying on the floor. Any geometric shape is available.



Inside and outside (covered, Zone 2)



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, etc.



R 11 slip resistance as per DIN 51130

### Colours



Light grey no. 220



Anthracite no. 200



Beige no. 420



Blue no. 114

### Model GS 17 R

<b>Approx. height (mm)</b>	17
<b>Roll-over and drive-over capability:</b>	Wheelchairs Prams Light shopping trolleys hand trolleys
<b>Standard profile clearance approx. (mm)</b>	0 mm, closed system
<b>Connection</b>	Plastic-coated steel cable
<b>Max. width/profile length for individual section (mm):</b>	2000
<b>Depth/walking depth for individual section (mm):</b>	800
<b>Weight (kg/m<sup>2</sup>)</b>	11.9
<b>Mat divisions as per factory standards or customer specifications</b>	As of a profile length of 2000 mm or a maximum mat weight of 45 kg
<b>Support chassis</b>	Made using rigid aluminium with sound absorbing insulation on the underside
<b>Tread surface</b>	Recessed, robust, weather-proof, ribbed carpet strips.
<b>Colour fastness to artificial light ISO 105-B02</b>	good 6
<b>Colour fastness to rubbing ISO 105 X12</b>	good 4
<b>Colour fastness to water ISO 105 E01</b>	good 5

## emco GS17 With ribbed carpet insert

---

# Model GS 17 R

### Service and services

Construction site advice

Measured using laser measuring device on site.

Fitting and installation service

Cleaning by mobile mat cleaning system

The product can be disposed of or recycled in an environmentally friendly way.

### Accessories

emco installation frame 500: 500-20 AL Aluminium

emco installation frame 500: 500-20 CN Chrome-nickel steel (V2A)

Rubber underlay 1 mm: GU 1

Rubber underlay 3 mm: GU 3

Rubber underlay 5 mm: GU 5

Mat joining brackets: MV Supplied as standard with mats in several parts

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems) ·  
Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email: bau@emco.de  
· www.emco-bau.com

