



# Model Structura 220 FR

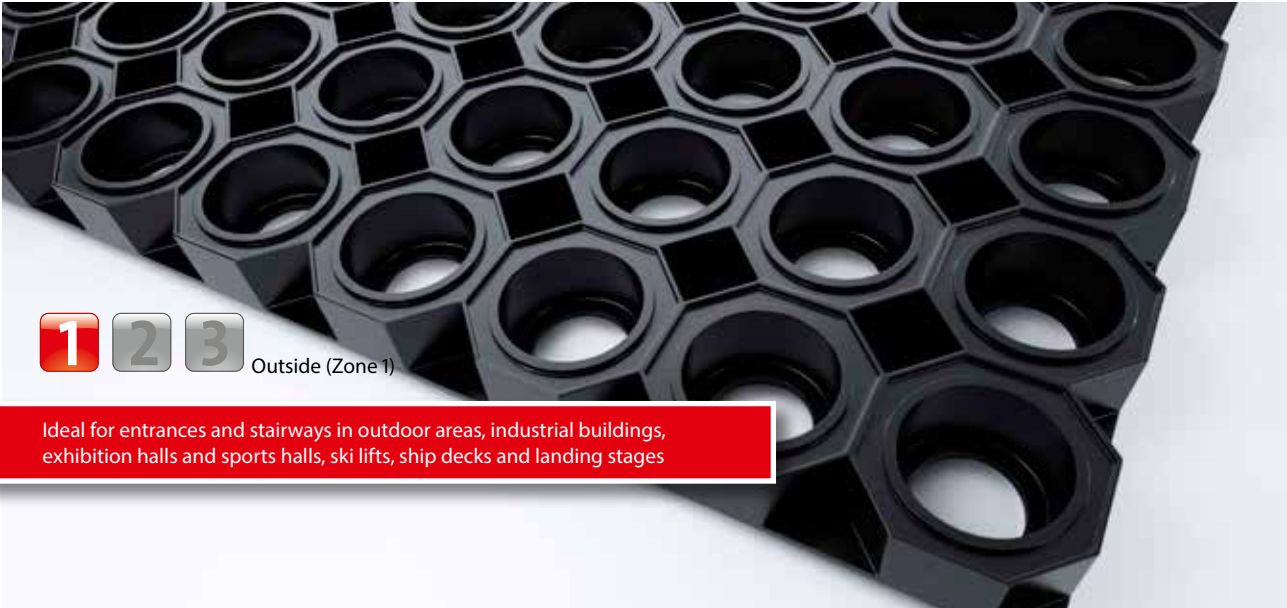

**1** **2** **3** Outside (Zone 1)

Ideal for entrances and stairways in outdoor areas, industrial buildings, exhibition halls and sports halls, ski lifts, ship decks and landing stages

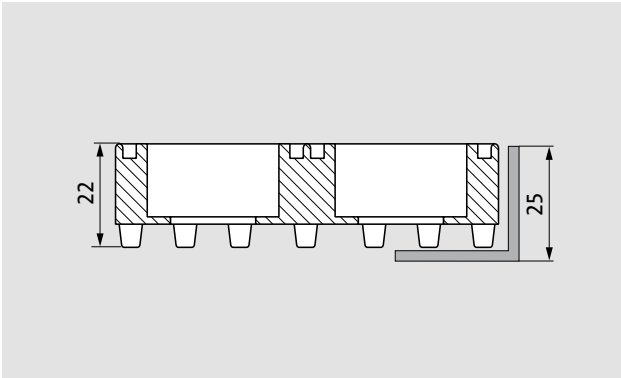

### Description

Extremely robust, general purpose mat with excellent cleaning effect (for protection against coarse dirt). Because it is easy to clean and offers a straightforward water drainage system as well as a high level of temperature resistance (-30 to +50 °C), it is also ideal for outdoor areas with snow and high levels of moisture.



Outside (Zone 1)



Outside (Zone 1)



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, loose chippings, coarse sand, small gravel particles



Flammability in accordance with European standard Bfl-s1. (Tested by the Textiles & Flooring Institute GmbH).



### Colours



Rubber honeycomb mat: black

## emco STRUCTURA without double ring round brushes

### Model Structura 220 FR

Approx. height (mm)	22	Accessories
Weight (kg/m <sup>2</sup> )	13,5	emco installation frame 500: 500-25 AL Aluminium
Tread surface	Octagonal honeycomb pattern. Dimension tolerance +/- 1.5%	emco installation frame 500: 500-25 CN Chrome-nickel steel (V2A) emco installation frame 500: 500-25 MS Natural brass
Flammability	Fire behaviour in accordance with Euro standard Bfl-s1. Tested by the Textiles & Institute GmbH.	emco installation frame 500: 500/N 600x400 Aluminium emco installation frame 500: 500/N 800x500 Aluminium
Material	High-quality solid rubber, weather-proof, abrasion-proof	emco installation frame 500: 500/N 900x600 Aluminium emco installation frame 500: 500/N 1000x600 Aluminium
Water drainage	Dimples on the underside combined with open honeycomb bases ensure excellent drainage	emco installation frame 500: 500/N 1000x800 Aluminium emco installation frame 500: 500/N 1000x1000 Aluminium
Custom mats	Bespoke cuts enable practically any direction to be accommodated. (Mat sizes up to 2 m <sup>2</sup> are manufactured with the parts bonded together; larger mat systems are supplied in several parts - with solid rubber connection elements)	emco installation frame 500: 500/N 1200x800 Aluminium

Subject to technical modifications